




## Pressure Switches

SG1-02-\*-1\*


ST1-02-\*-1\*

**Pressure Switches**  
**SG1-02-\*0-11**  
**ST1-02-\*0-11**

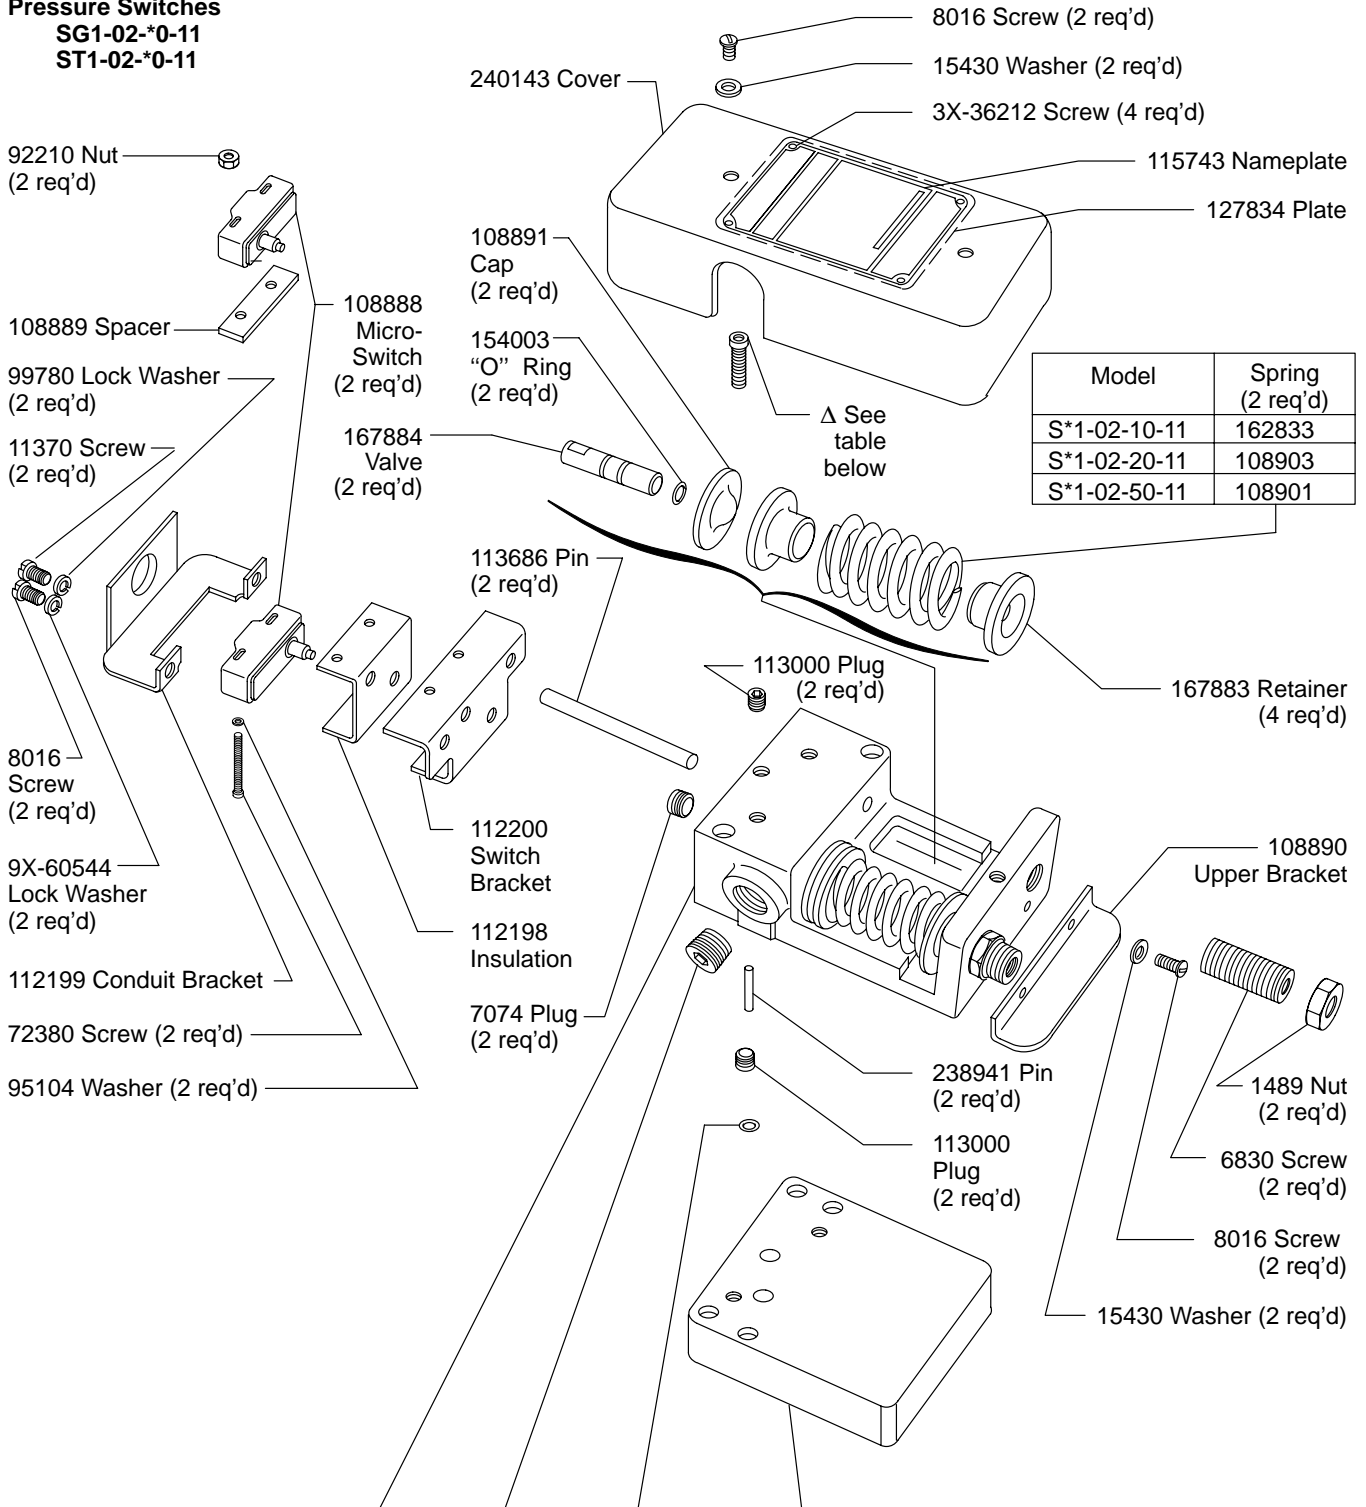

Model	ΔScrew (2 req'd)	Body	Plug (2 req'd)	"O" Ring (2 req'd)	Sub-Plate
SG1-02-*0-11	1036	240042	7075	124582	169161
					SG1SM-02-10
ST1-02-*0-11	—	235298	—	—	183627
					SG1SM-8S-02-10


**Pressure Switches**  
**SG1-02-\*0-10**  
**ST1-02-\*0-10**

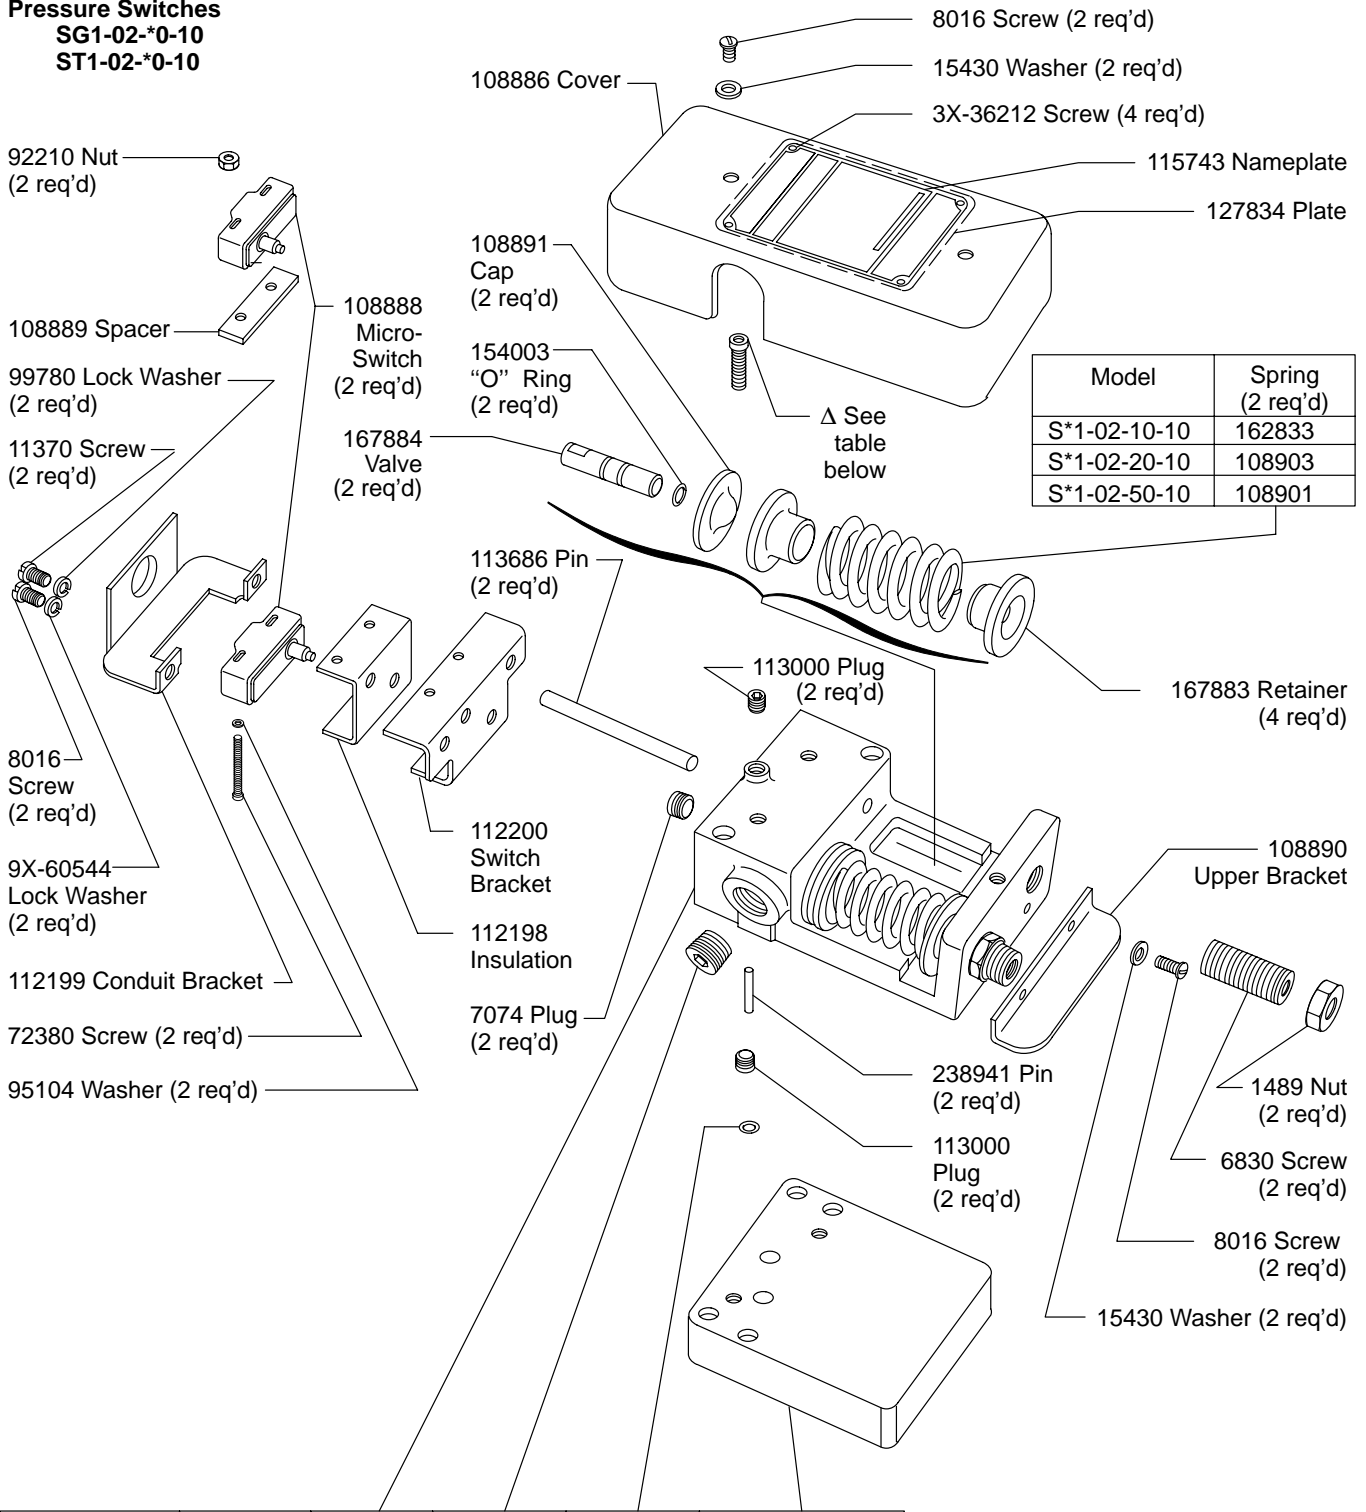

Model	ΔScrew (2 req'd)	Body	Plug (2 req'd)	"O" Ring (2 req'd)	Sub-Plate
SG1-02-*0-10	1036	169162	7075	124582	169161
					SG1SM-02-10
					183627
ST1-02-*0-10	—	108885	—	—	SG1SM-8S-02-10

# Model Code

---



---

**1 Mounting**

**G** - Gasket mounted  
**T** - Threaded connection

**3 Pressure Range**

**10** - 100 - 1000 PSI  
**20** - 100 - 2000 PSI  
**50** - 500 - 5000 PSI

**4 Design**

10 Design  
11 Design

---

**2 Connections**

1/4 Inch connections

For satisfactory service life of these components in industrial applications, use full flow filtration to provide fluid which meets ISO cleanliness code 18/15 or cleaner. Selections from Vickers OFP, OFR, and OFRS series are recommended.

Printed in U.S.A.

**Eaton Hydraulics**

15151 Highway 5  
Eden Prairie, MN 55344  
Telephone: 612 937-7254  
Fax: 612 937-7130  
[www.eatonhydraulics.com](http://www.eatonhydraulics.com)

46 New Lane, Havant  
Hampshire PO9 2NB  
England  
Telephone: (44) 170-548-6451  
Fax: (44) 170-548-7110

