







ROTARY MANIFOLD FOR TRACKED AND WHEELED EXCAVATORS




- 6 hydraulic passages
- Max pressure 35MPa (350bar)
- Working pressure 32MPa (320bar)
- Working conditions -30°C / +60°C
- Rotating speed up to 10rpm
- Shaft 100mm

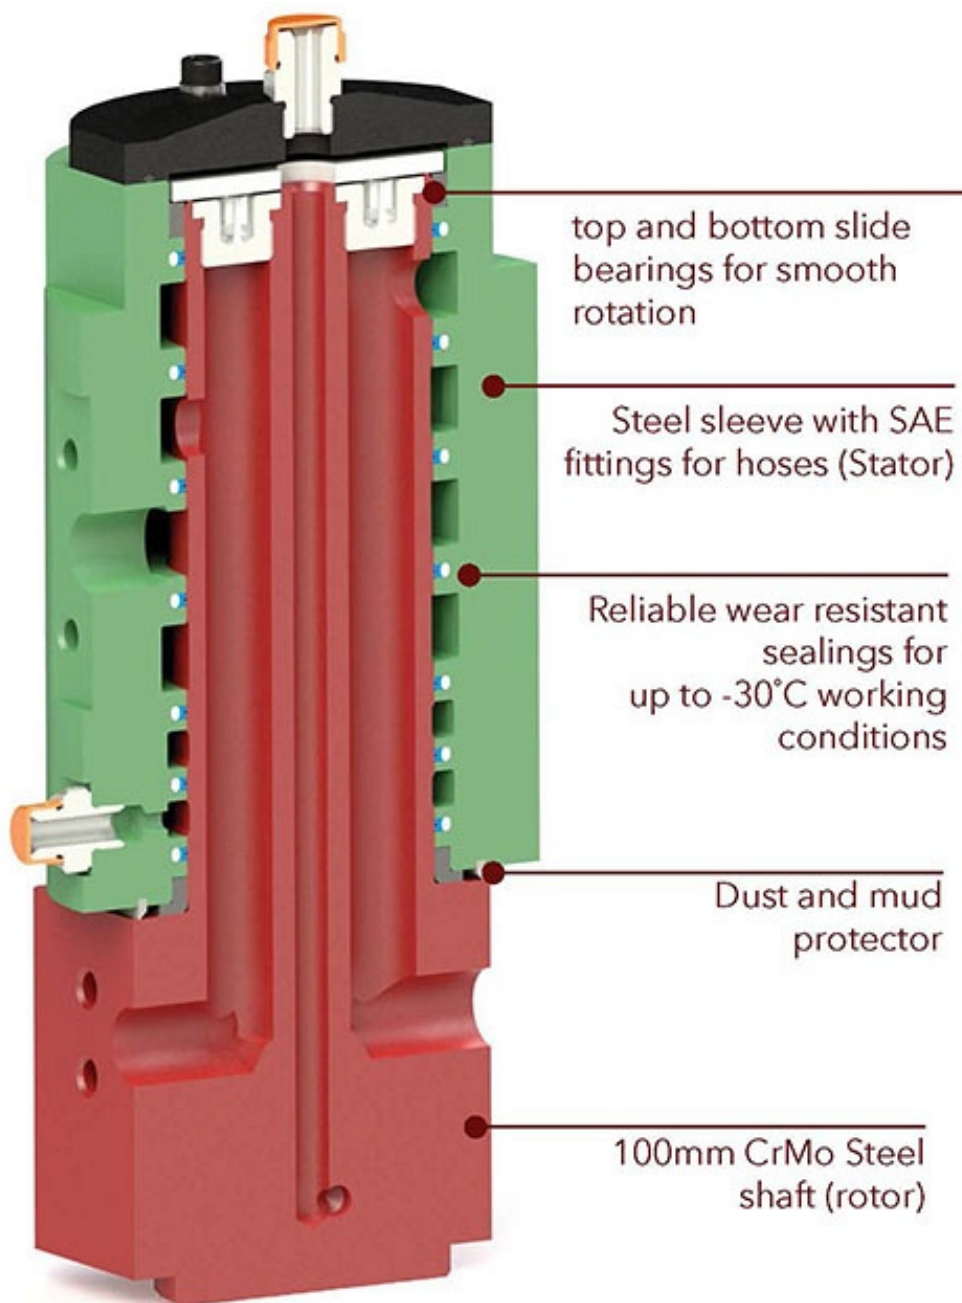


6 HYDRAULIC PASSAGES

ROTARY MANIFOLD FOR TRACKED AND WHEELED EXCAVATORS
6 AND 11 HYDRAULIC PASSAGES

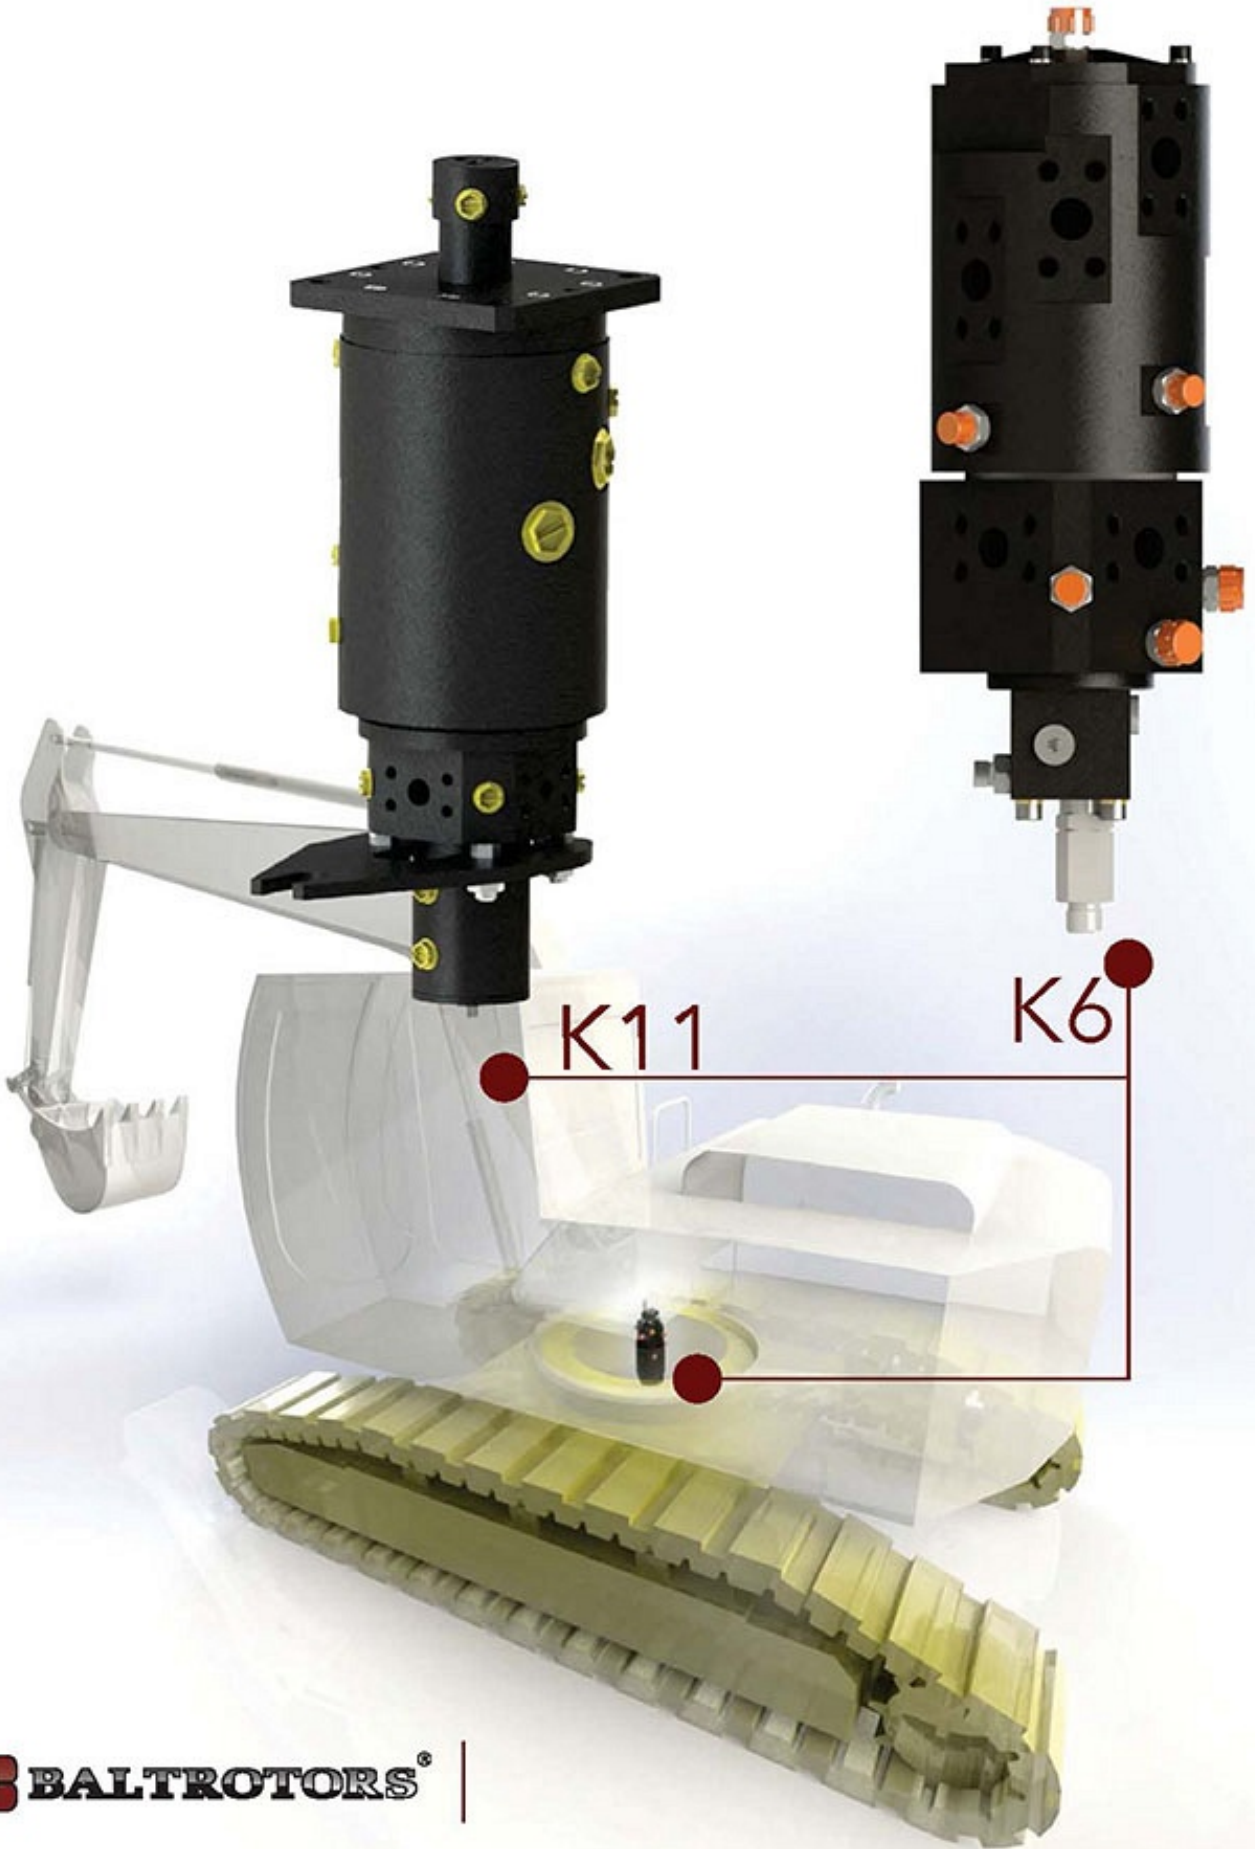

BALTROTORS® | K6-SP02 dimensions

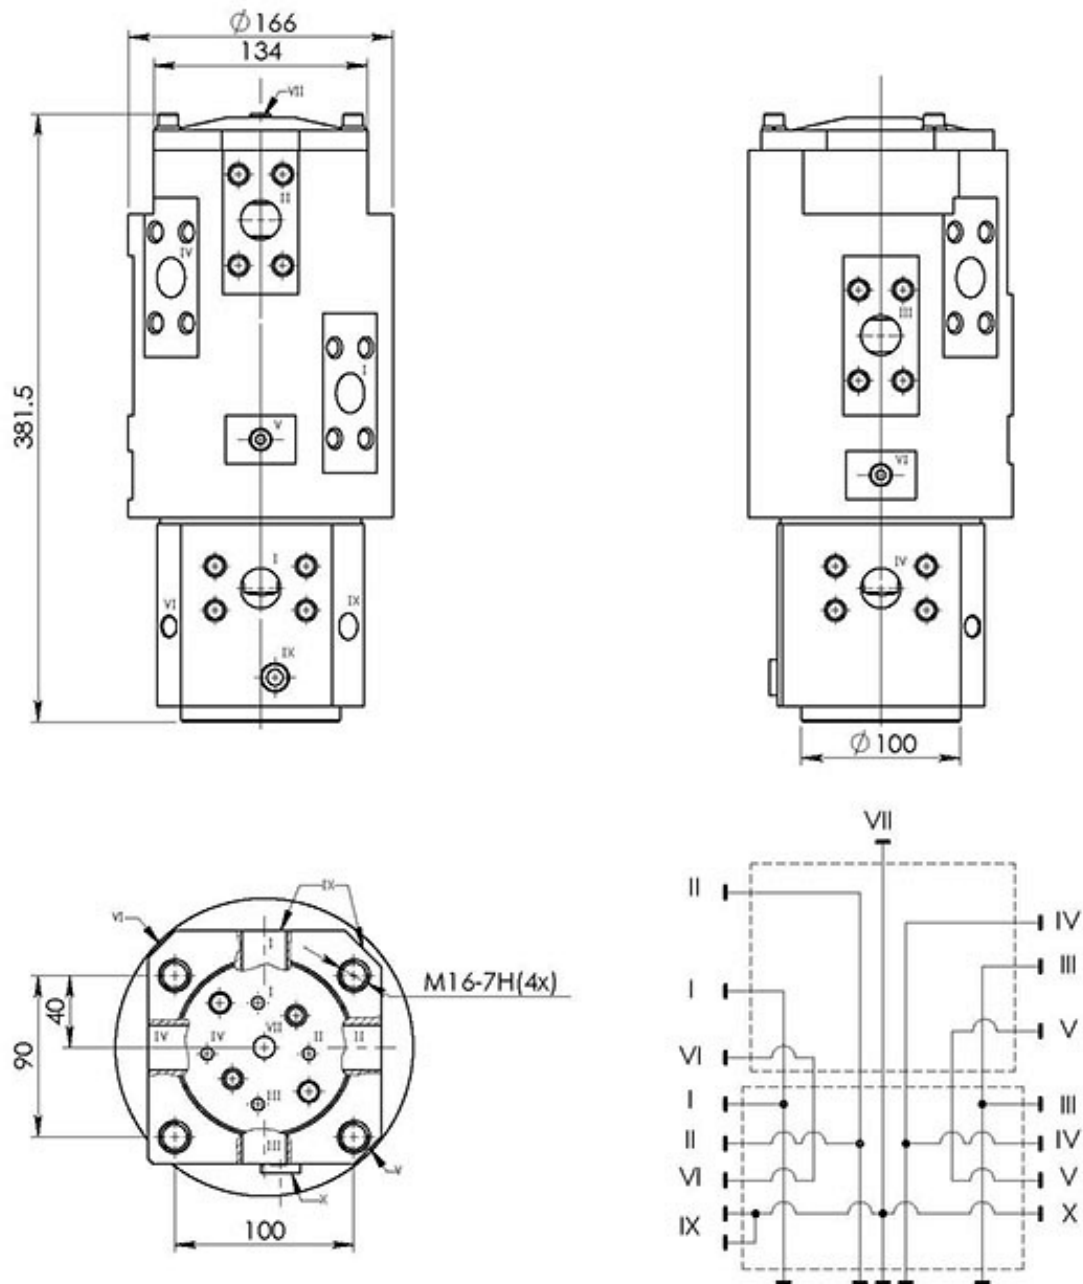

Pos.	Stator	Rotor	Rotor extra	Working pressure, (bar)	Max. pressure, (bar)	Fluid
I	SAE 1"*	SAE 1"*	∅ 6.8	320	350	Hydraulic oil
II	SAE 1"*	SAE 1"*	∅ 6.8	320	350	Hydraulic oil
III	SAE 1"*	SAE 1"*	∅ 6.8	320	350	Hydraulic oil
IV	SAE 1"*	SAE 1"*	∅ 6.8	320	350	Hydraulic oil
V	M14x1.5	M12x1.5	-	320	350	Hydraulic oil
VI	M14x1.5	M14x1.5	-	320	350	Hydraulic oil
VII	M18x1.5	∅ 12	-	320	350	Hydraulic oil
VIII	-	-	-	-	-	-
IX	-	M18x1.5	M18x1.5	320	350	Hydraulic oil
X	-	M14x1.5	-	320	350	Hydraulic oil

* PORT DIMENSIONS ACCORDING TO ISO 6362-1/-2 (SAE 3510)