


INDUSTRIAL ROTATOR **CPR15-03**

(PATENTED)

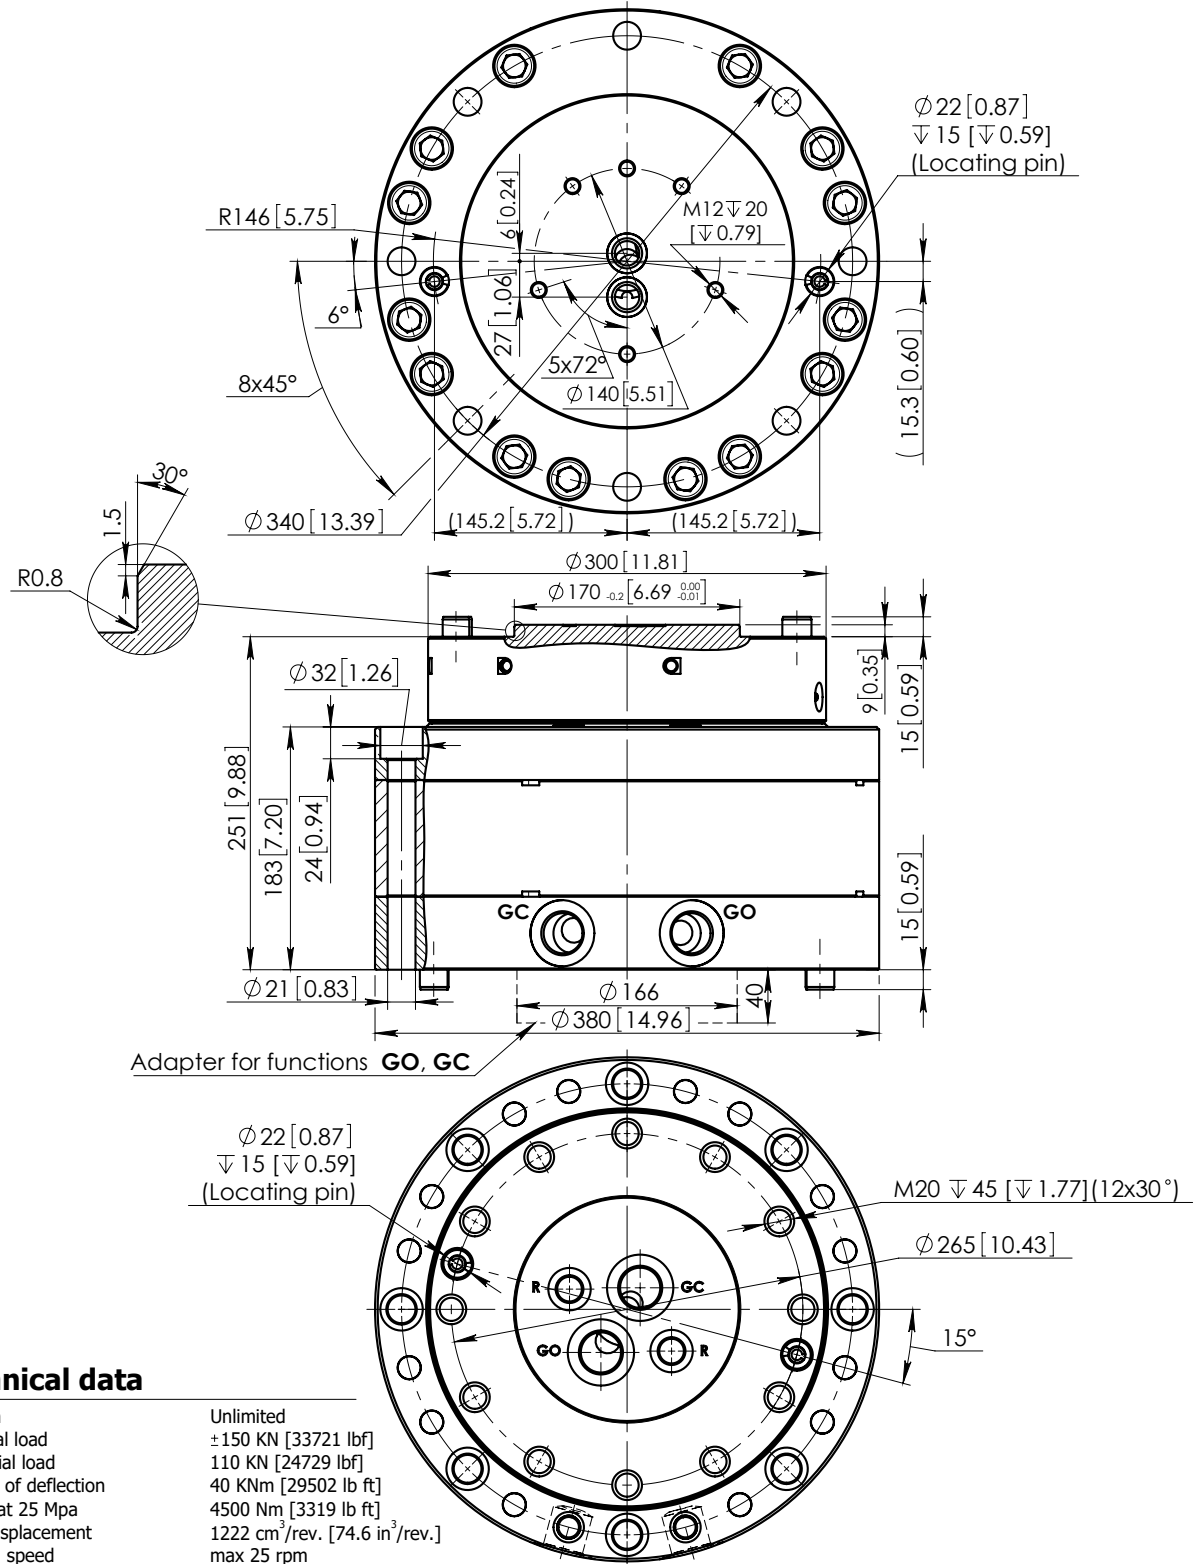

Adapter for functions **GO, GC**

Technical data

Rotation	Unlimited
Max axial load	± 150 KN [33721 lbf]
Max radial load	110 KN [24729 lbf]
Moment of deflection	40 KNm [29502 lb ft]
Torque at 25 Mpa	4500 Nm [3319 lb ft]
Rated displacement	1222 cm ³ /rev. [74.6 in ³ /rev.]
Rotation speed	max 25 rpm
Oil duct area for grapple	260 mm ² [0.403 in ²]
Weight	182 kg [401 lb]

Function	Max working pressure	Rec oilflow	Connection
R - rotation	25 MPa [3625 psi] *	35 l/min [9.2 gal(US)/min]	G 1/2
GO - grapple/tool open	35 MPa [5076 psi]		G 1
GC - grapple/tool close	35 MPa [5076 psi]		G 1

* Relief valves fitted

Operating machine

e.g. excavator max weight

Connected via link 29t
Rigid mounted 21t