



◆ MODEL 型 式


LKT-03



LKT-04

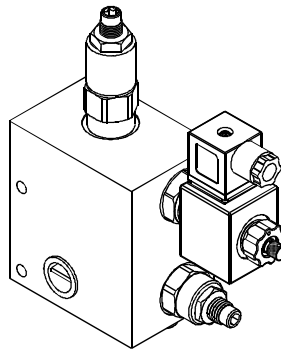

LKT-06



◆ SPECIFICATIONS 規 格

| Model Number 型式號碼 | Maximum Pressure 最大壓力 | Maximum tank line back pressue 最大容許背壓 Mpa | Maximum tank frequencies of operation 最高切換頻率 | Maximum Flow 最大流量 lpm | Weight 重量 Kg |
|-------------------------------|-----------------------------------|---|--|--------------------------|-----------------|
| LKT-03 | 21 Mpa (210 kgf/cm ²) | 0.07 (0.7 kgf/cm ²) | 60 Cycles/min | 30 (7.92 gpm) | 1.7 (3.7 lbs) |
| LKT-04 | 250 bar (3625 psi) | — | — | 70 (18.49 gpm) | 2.1 (4.7 lbs) |
| LKT-06 | 250 bar (3625 psi) | — | — | 120 (31.70 gpm) | 3.9 (8.6 lbs) |
| Fluid Type 流體型式 | | | ISO VG 32, 46, 68 | | |
| Viscosity 黏性 cSt | | | 10~400 (59~1854 SSU) | | |
| Operating Temperature 操作溫度 °C | | | -15~70 (-5~158 °F) | | |
| Contamination Level 污染標準 | | | ISO4406. 21/19/16 NAS1638,10 | | |

◆ HOW TO ORDER 編號說明

| | | | | | |
|----------|----------|----------|----------|----------|----------|
| 1 | 2 | 3 | 4 | 5 | 6 |
| LKT | 03 | T | A1 | X | Y |

1 VALVE SERIES 系列名稱

LKT= LIFT Valves
升降閥

2 SUBPLATE MOUNTING SIZE: 稱呼口徑

03 = 3/8"(9mm) 04=1/2"(12mm)
ISO CETOP5 ISO CETOP7
DIN NG 10 DIN NG 16
NFPA D05 NFPA D07

06= 3/4"(19mm)
ISO CETOP8
DIN NG 25
NFPA D08


3 CONNECTING TYPE 連接型式

T:TYPE:THREADING TYPE (螺紋連接)

4 TYPE OF COIL 電磁閥電磁線圈類型


A1 : AC110 60HZ D1: DC12
A115: AC115 50HZ D2: DC24
A230: AC230 50HZ R1: RF110 60HZ/50HZ
A2 : AC220 60HZ R2: RF220 60HZ/50HZ

◆ CONTROL PORT(S) 動作形式



5 WIRING TYPE 接線型式


Non: WIRING BOX TYPE(DIN) X: DOUBLE LEAD
無: 接線盒式(DIN) 雙接線方式



6 ADJUSTMENT OPTION 調整選擇

Non: Standard 無記號: 標準型

Y: Twist Style Manual Override (Emergency Drop)
旋緊型-手動操作復位 (緊急下降)

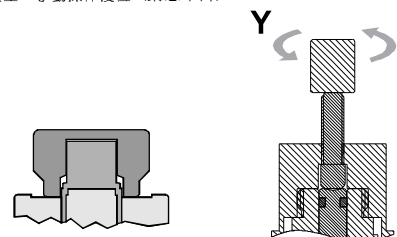

A
LKT


LIFT VALVES

LKT SERIES 升降閥

A
LKT

◆ DIMENSIONS 外型尺寸圖


LKT-03

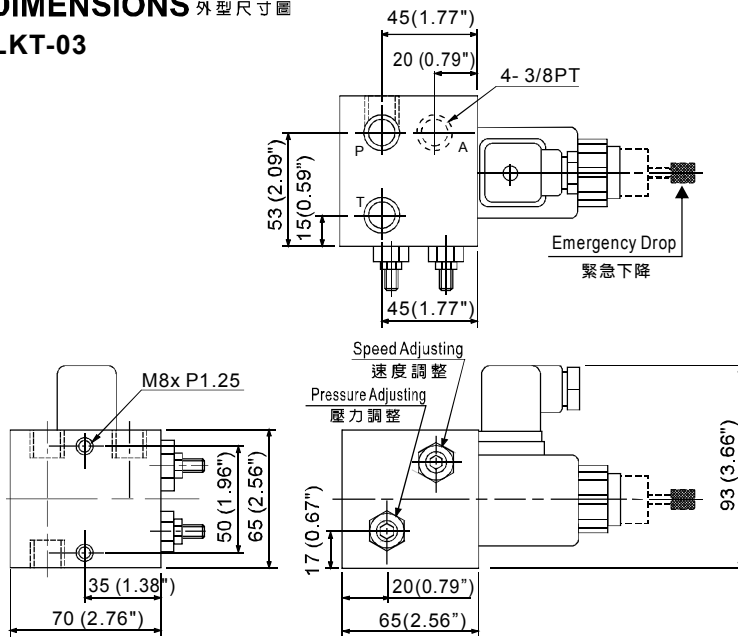


◆ PERFORMANCE (Cartridge Only)

特性曲線


LKT-03

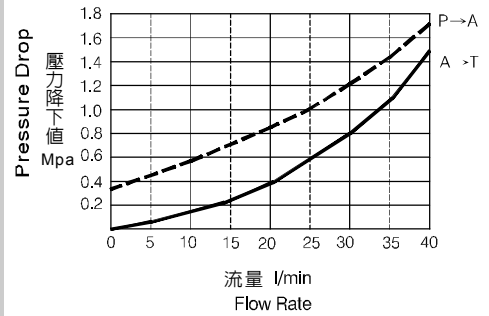


LKT-04

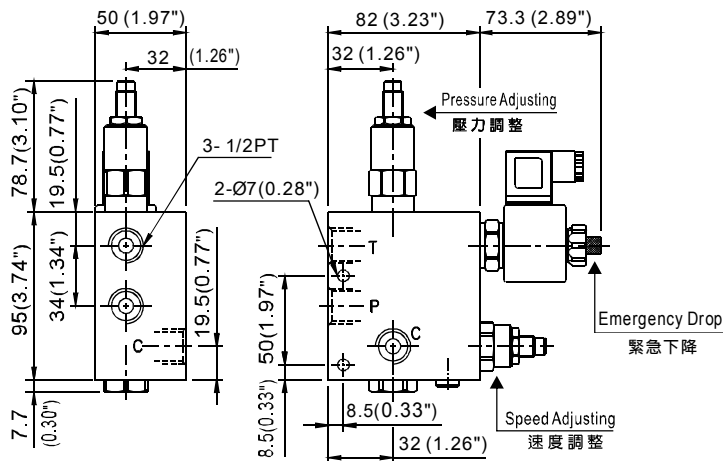

LKT-04

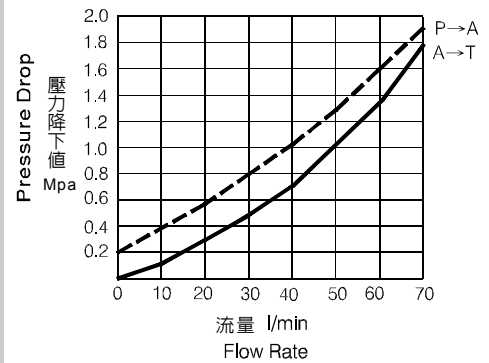

LKT-06

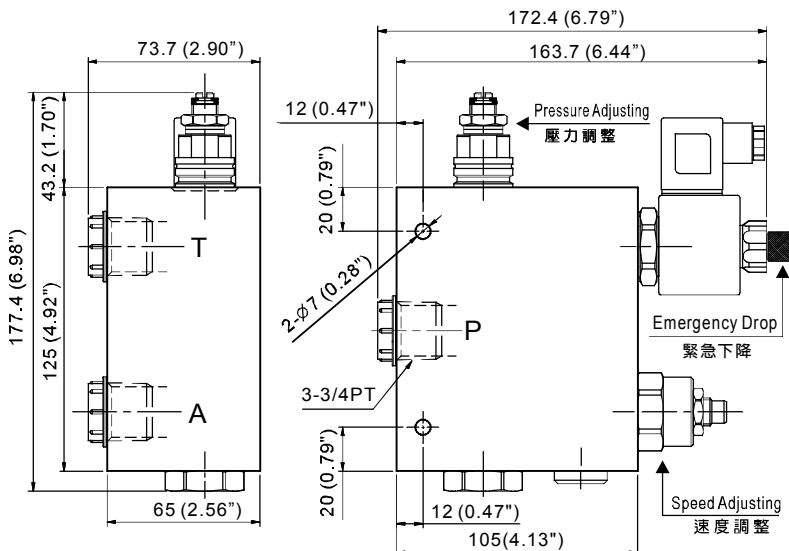

LKT-06

