



◆ MODEL 型式

DMD-35

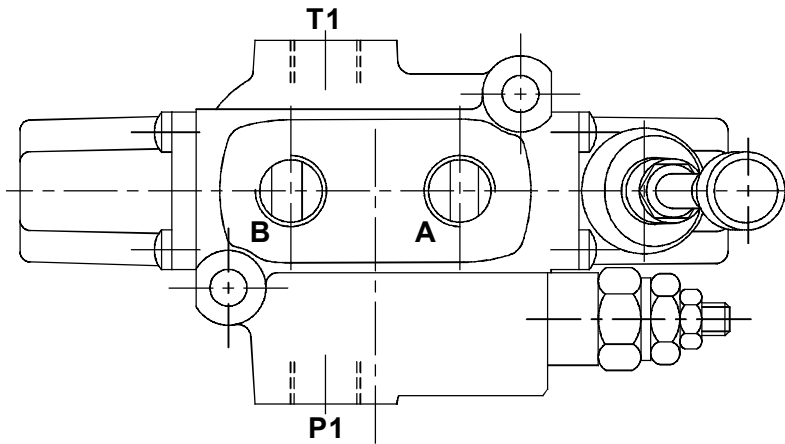

◆ CONTROL PORT(S) 動作形式

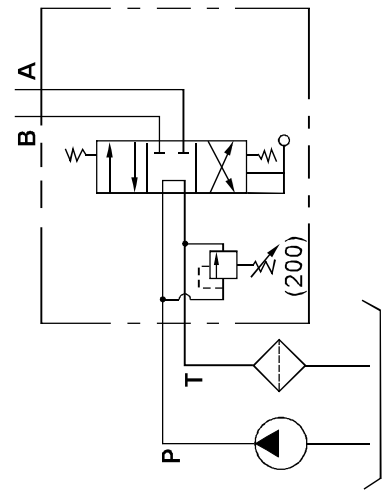

◆ SPECIFICATIONS 規格

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Maximum Flow 最大流量 lpm	Weight 重量 Kg
DMD-35-**-**	350 (5075 psi)	50 (13.2gpm)	4.5 (9.9 lbs)
DMD-45-**-**	350 (5075 psi)	70 (18.5gpm)	4.5 (9.9 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-15~70 (-5~158 °F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

● Standard pressure of relief valve sets at 210 bar.
出廠壓力調節閥標準設定最大壓力210bar

※Any request of setting pressure at 350 bar, please inform CW in advance.
※For relief valves, please refer to VRV-03 series.
※如需設定壓力為350bar需先告知 ※調壓閥請參考VRV-03系列

◆ HOW TO ORDER 編號說明

1	2	3
DMD	35	C6

1 VALVE SERIES 系列名稱

DMD = Stack Valve (Monoblock)
多路換向閥(單體式)

3 MODEL 型式

C: Spring Type 彈簧式
D: Steel Ball Positioning Type 鋼珠定位式

2 SUBPLATE MOUNTING SIZE 稱呼口徑



35 = G3/8"
45 = G1/2"

STACK VALVE

DMD SERIES

多路換向閥系列

◆ DIMENSIONS 外型尺寸圖

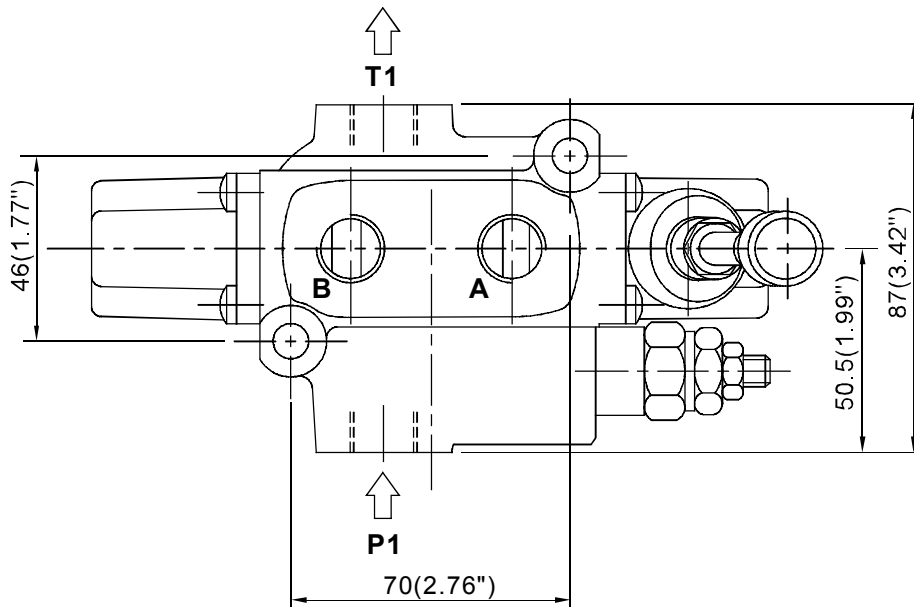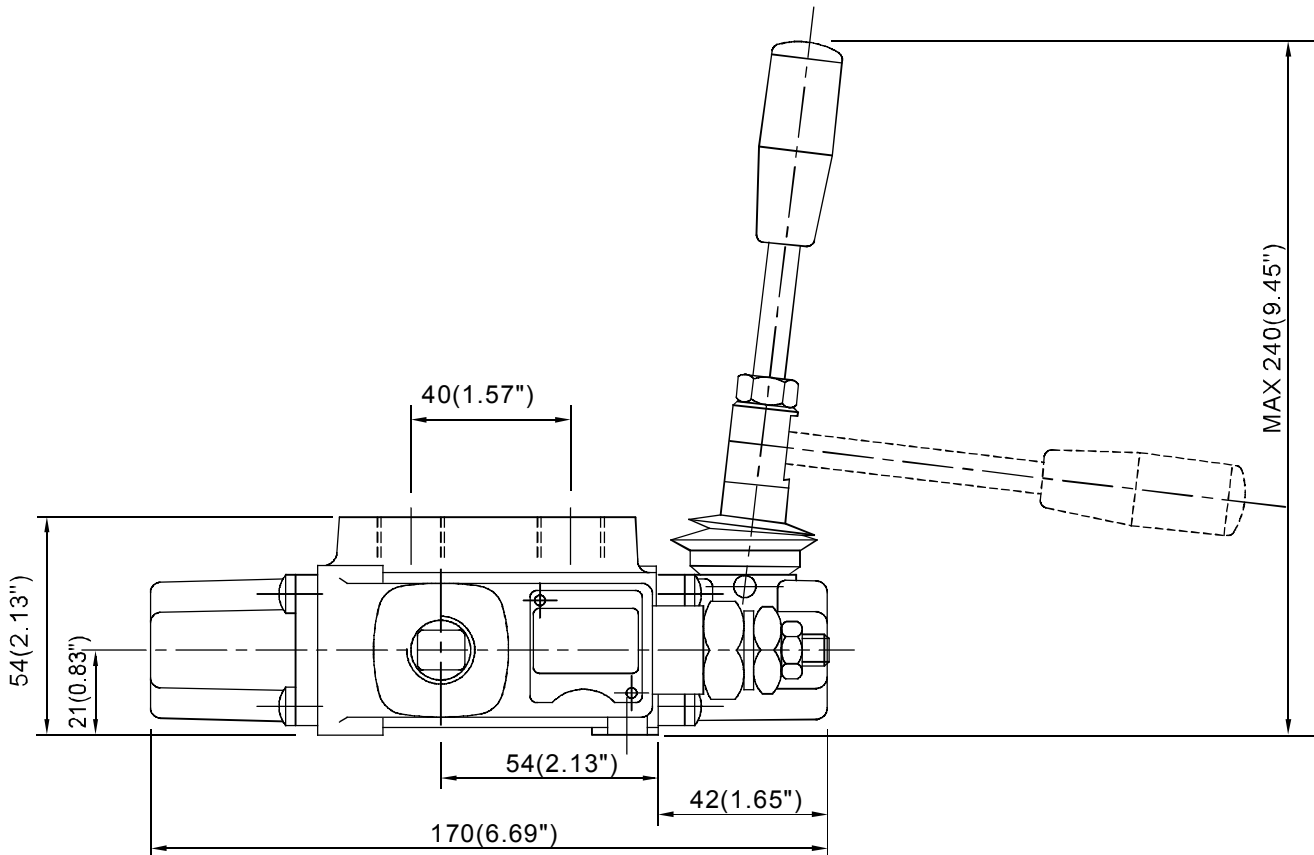

◆ AVAILABLE THREADS 適用螺紋

PORTS 閥口	P1	A-B	T1
DMD-35-**-**	G 3/8"	G 3/8"	G 3/8"
DMD-45-**-**	G 1/2"	G 1/2"	G 1/2"