


## ◆ MODEL 型式

LVSH-03G



## ◆ PERFORMANCE (Cartridge Only) 特性曲線

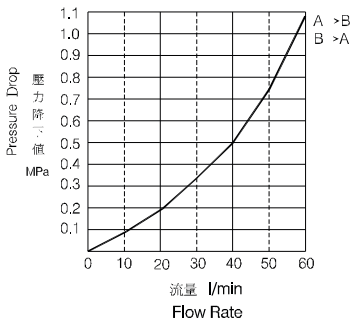

## ◆ SPECIFICATIONS 規格

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Maximum Flow 最大流量 lpm	Weight 重量 Kg
LVSH-03G	315 (4500 psi)	50 (13.21 gpm)	2.4 (5.3 lbs)
Fluid Type 液體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-15~70 (-5~158 °F)	
Contamination Level 污染標準		ISO4406, 21/19/16 NAS1638,10	
Surface Treatment 表面處理		Zinc Phosphate Compound 磷酸鹽 化合物	

◆ All screws with metric measure, if require inch measure, please contact us.

所有螺絲皆為公制標準規格品，若需英制螺絲請另外備註說明。

## ◆ HOW TO ORDER 編號說明

1	2	3	4	5
LVSH	03	G	**	20

## 1 VALVE SERIES 系列名稱

LVSH= Solenoid Check Valves

## 4 TYPE OF COIL 電磁閥電壓線圈類型

A1 : AC110 60HZ D1 : DC12  
 A115 : AC115 50HZ D2 : DC24  
 A230 : AC230 50HZ R1 : RF110 60HZ/50HZ  
 A2 : AC220 60HZ R2 : RF220 60HZ/50HZ

## 2 SUBPLATE MOUNTING SIZE: 插口直徑

03= 3/8"(9mm)  
 ISO CETOP5  
 DIN NG 10  
 NFPA D05


## 5 DESIGN NO 設計編號

## 3 CONNECTING TYPE 連接型式

G:TYPE:BASEPLATE MOUNTING TYPE

G: (板式連接)

## ◆ CONTROL PORT(S) 動作形式



# SOLENOID CHECK VALVES

LVSH-03G

電磁止逆閥

## ◆ DIMENSIONS 外型尺寸圖

LVSH-03G-W

## ● Mounting Interface 安裝板面

ISO 4401-AC-05-4-A

A  
LVSH

