

DGMPC Pilot Operated Check Valves

General Description

These valves are single or dual check units. Dual check units have identical check elements located in the "A" and "B" cylinder port lines. The check valve poppets are moved into the open position by a central pilot control spool which moves toward one check or the other, depending on which port is pressurized.

The check valve located in the return circuit is opened by the operating pressure in the primary circuit. When the pressure in the pilot line is vented, the check valve will remain closed.

The pilot spool area to valve seat ratio is 3:1 on standard models, and 20:1 on models with the decompression feature.

Check valve cracking (opening) pressures of 1 bar (15 psi), 2,5 bar (36 psi) and 5 bar (73 psi) are available. Please note that back pressure on the downstream or free-flow side of the pilot check valve may prevent the valve from opening in certain situations. (Back pressure opposes pilot pressure trying to open the valve.) In such cases, pilot pressure required to open the decompression poppet and valve can be calculated as follows:

To open valve or poppet in line A:

$$\text{Pressure at } B_1 = \frac{P_A + P_C - P_{A1}}{\text{Area ratio factor}} + P_{A1}$$

To open valve or poppet in line B:

$$\text{Pressure at } A_1 = \frac{P_B + P_C - P_{B1}}{\text{Area ratio factor}} + P_{B1}$$

Where:

P_A = Pressure at A
 P_C = Cracking pressure
 P_{A1} = Pressure at A_1
 P_B = Pressure at B
 P_{B1} = Pressure at B_1


In the above cases, substitute cracking pressure and area ratio from the following:

Cracking pressure: 1, 2,5 or 5 bar according to model code position 6 (and position 10 for second function).

Area ratio factors:

Standard valve: 3
 Decompression poppet: 20

Model Code



1 Valve function

Manifold or subplate mounted check valve.

2 Interface

5 - ISO 4401-AC-05-4-A, CETOP RP35H, Size 5 ANSI/NFPA D05
 5N - NFPA D05 (Alt. A)
 5P - NFPA D05 (Alt. B)

3 Decompression feature

D - With decompression feature
 Blank - Standard (no decompression)

4 Check port

A - Check in cylinder port "A"
 B - Check in cylinder port "B" (single check models only)

5 Pilot port

A - Pilot port controlling the "B" port check (single check models only)
 B - Pilot port controlling the "A" port check

6 Cracking pressure

K - 1,0 bar (15 psi)
 M - 2,5 bar (35 psi)
 N - 5,0 bar (75 psi)

7 Decompression feature

D - Decompression feature
 Blank - Standard (no decompression)
 Omit for single check models.

8 Check port: second function

B - Check in cylinder port "B"
 Omit for single check models.

9 Pilot port: second function

A - Pilot port controlling the "B" port check (dual check models only)
 Omit for single check models.

10 Cracking pressure: second function


K - 1,0 bar (15 psi)
 M - 2,5 bar (35 psi)
 N - 5,0 bar (75 psi)
 Omit for single check models.

11 Design number - 30 series

Subject to change. Installation dimensions unaltered for design numbers 30 to 39 inclusive.

Operating Data

Functional Symbols

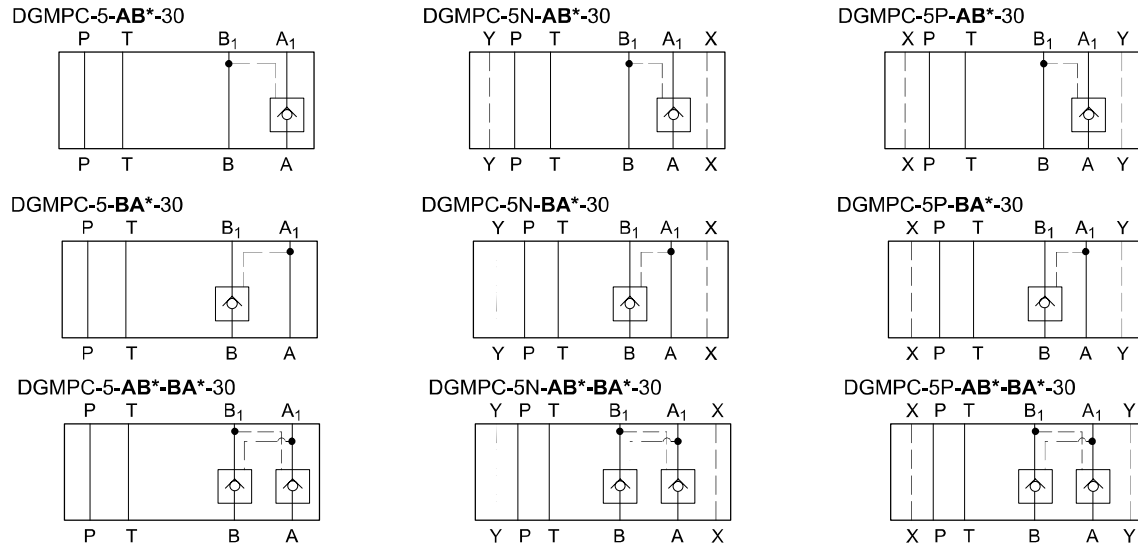

Basic Characteristics


- Maximum flow rate: 120 l/min (32 USgpm)
- Maximum operating pressure: 315 bar (4500 psi)
- Leakage @ 50° C (120° F)
 - Poppet @ 35 bar (500 psi)
 - Standard models 0,3 ml/min.
 - "D" models 1,0 ml/min.
 - Piston @315 bar (4500 psi) 200 ml/min.
- Operating Temperature: 20° C to 50° C (70° to 120° F)
- Weight: 2,9 kg (6.4 lbs)

DGMPCC Pressure Drop

The curves below show pressure drop through each functional flow path in the valve. The total insertion loss for the valve must be calculated by summing the losses through the four applicable flow paths.

Model Type	Curve Number							
	P	T	A		B			
DGMPCC-5-(D)-AB*-30	1	2	-	5	▲	●3 ■4	-	-
DGMPCC-5-(D)-BA*-30	1	2	●3 ■4	-	-	-	5	▲
DGMPCC-5-(D)-AB*-(D)-BA*-30	1	2	-	5	▲	-	5	▲

- Flow toward actuator without check – single check only
- Flow from actuator without check – single check only
- ▲ Use K, M, or N cracking pressure curve as applicable.

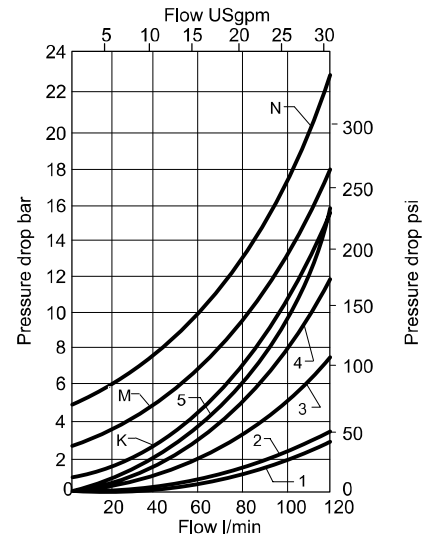

Installation Dimensions

DGMPC-5-30 Pilot Operated Check Valve

mm (inches)

See page 38 for interface dimensions.

4 mounting holes
 \varnothing 6,9 (0.27) through
 \varnothing 9,50 (0.37) counterbore
 36,5 (1.44) deep
 for bolt extenders
 (order separately)
 BKE-6M-50M (M6 metric) or
 BKE-4-50M (.2500-20 UNC)
 Torque: 11,3-14,7 Nm
 (100-130 lb. in.)

