


AH1012 AH1012-3P

To avoid the leakage caused by peak pressure, an Anti-Explosion Valve or By-Pass Valve should be always mounted. Off-Line cooling is strongly recommended. Pumping the oil from the tank to the heat exchanger with a separated cooling pump. Please refer to 《Installation & Maintenance》 for more detail.

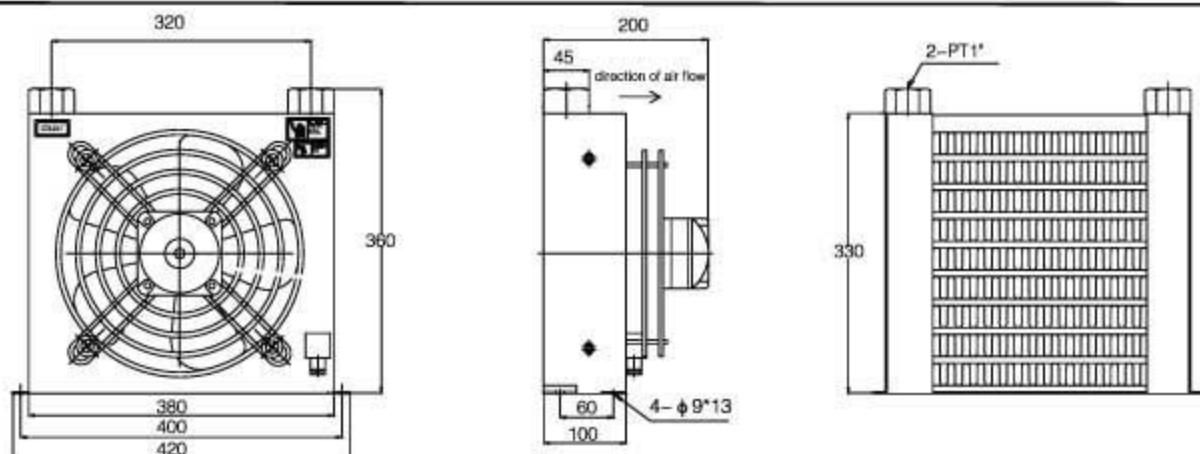

AH1012

Part No.	Flow Rate	Standard Voltage	Frequency	Power	Current	Rotation Speed	Air Flow	IP Level	Noise	Certification
	L/min	V	Hz	W	A	R. P. M	m³/h	IP	dB (A)	
AH1012-CA2	20-100	1P 230	50/60	60/58	0.42/0.36	1300/1550	1500	54	55	CE
AH1012-CA1		1P 115	50/60	60/58	0.8/0.74	1300/1550	1500	54	55	CE
AH1012-CD1		DC 12		192	16	2000	1500		60	CE
AH1012-CD2		DC 24		192	8	2400	1500		60	CE

Note: DC motor is carbon brush structure, life is about 2000 hours.

AH1012-3P

Part No.	Flow Rate	Standard Voltage	Frequency	Power	Current	Rotation Speed	Air Flow	IP Level	Noise	Certification
	L/min	V	Hz	W	A	R. P. M	m³/h	IP	dB (A)	
AH1012-3P-CA2	20-100	3P 230	50/60	80	0.45	2200	1500	54	60	CE
AH1012-3P-CA3		3P 400	50/60	80	0.22	2600	1500	54	60	CE



AH1012-CA*

AH1012-3P-CA*

