


B

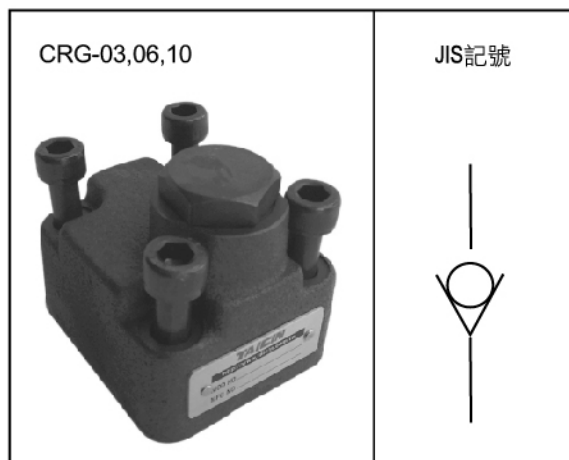

### ◆特性

1. 防止油的逆流。

### ◆Description

1. Effectively prevent from countercurrent.

### ■規格 Specification

| 型式號碼<br>Model number                   | 最大壓力(kg/cm <sup>2</sup> )<br>Maxi. Pressure | 接續口徑<br>Connecting Port | 流量(1/min)Rated Flow |         |
|----------------------------------------|---------------------------------------------|-------------------------|---------------------|---------|
|                                        |                                             |                         | 10 type             | 20 type |
| CRG-03-※ <sup>10</sup> / <sub>20</sub> | 250                                         | 3 / 8"                  | 30                  | 40      |
| CRG-06-※ <sup>10</sup> / <sub>20</sub> |                                             | 3 / 4"                  | 100                 | 125     |
| CRG-10-※ <sup>10</sup> / <sub>20</sub> |                                             | 1 1/4"                  | 250                 | 250     |

### ◎形式記號說明 Nomenclature

|          |    |          |    |          |    |          |    |          |
|----------|----|----------|----|----------|----|----------|----|----------|
| CRG      | -- | 06       | -- | 05       | -- | 10       | -- | 70       |
| <b>1</b> |    | <b>2</b> |    | <b>3</b> |    | <b>4</b> |    | <b>5</b> |

**1** 系列名稱 Valve Series

**2** 稱呼口徑 Nominal dia.

03=3/8" 06=3/4" 10=1 1/4"

**3** 彈簧開啓壓力Cracking Pressure

05:0.5kg/cm<sup>2</sup>

50:5kg/cm<sup>2</sup>

**4** 新型舊型編碼

-10 舊型 old type




-20 新型 new type

**5** 設計編號

Design number



### ■性能曲線 Performance

粘度:32mm<sup>2</sup>/s(cSt) 溫度50℃

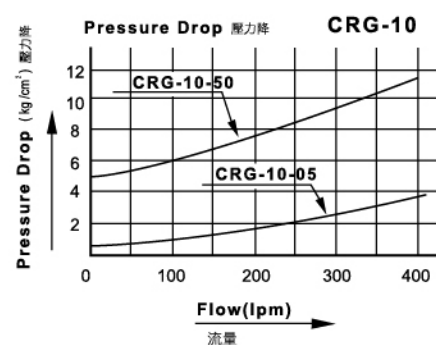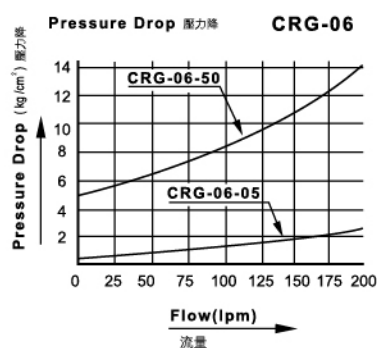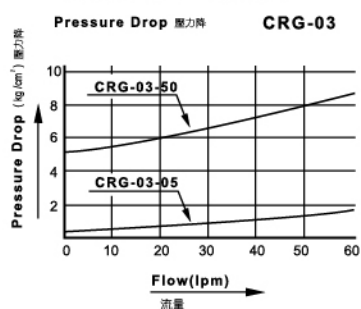

■外型尺寸圖 Unit Dimensions



CRG-03/06/10-※-10 (舊型 Old type)

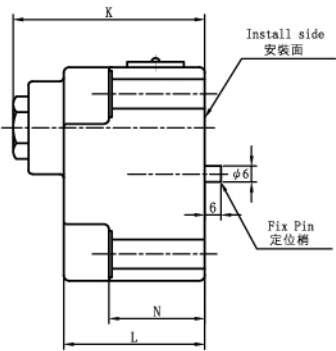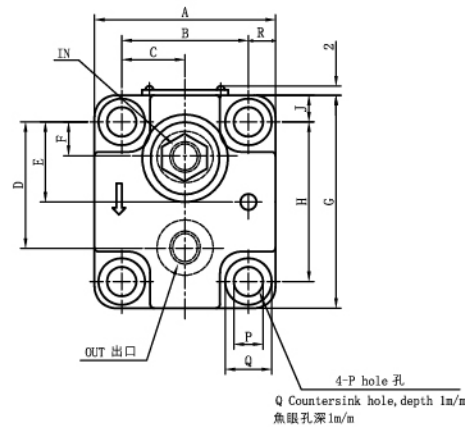

| MODEL型号 | A   | B    | C    | D    | E    | F    | G   | H    | J    | K  | L  | N  | P    | Q    | R     |
|---------|-----|------|------|------|------|------|-----|------|------|----|----|----|------|------|-------|
| CRG-03  | 68  | 47.6 | 23.8 | 47.6 | 30.1 | 12.7 | 80  | 60.3 | 10   | 72 | 46 | 36 | 11   | 17.5 | 10.2  |
| CRG-06  | 98  | 66.1 | 32.6 | 68.2 | 40.5 | 22.2 | 114 | 80.9 | 16.5 | 81 | 54 | 58 | 17.5 | 26   | 16.45 |
| CRG-10  | 130 | 92.1 | 46.1 | 71.4 | 46   | 20.6 | 130 | 92.1 | 19   | 96 | 67 | 50 | 21.5 | 32   | 18.95 |

Dimension:m/m  
Weight:  
-03:2.3kgs -06:4.1kgs -10:7.8kgs



CRG-03/06 ※-20 (新型 New type)

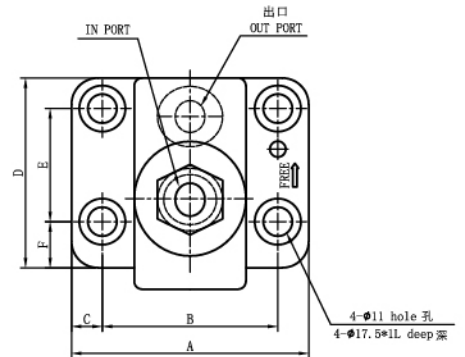

| MODEL  | A   | B    | C    | D  | E    | F    | G    | H  |
|--------|-----|------|------|----|------|------|------|----|
| CRG-03 | 90  | 66.7 | 11.7 | 72 | 42.9 | 17.5 | 72.5 | 31 |
| CRG-06 | 102 | 79.4 | 11.3 | 93 | 60.3 | 21.4 | 84.5 | 36 |

Dimension:m/m  
Weight:  
-03:1.7kgs -06:2.9kgs

CRG-10- ※-20 (新型 New type)

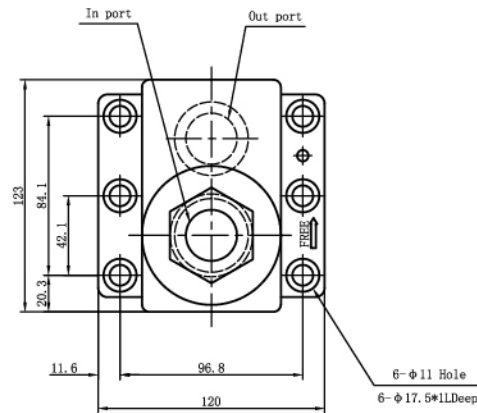


Dimension:m/m  
Weight: -10:5kgs


### ■ 安裝尺寸圖 Mounting data

B


#### CRG-03-10

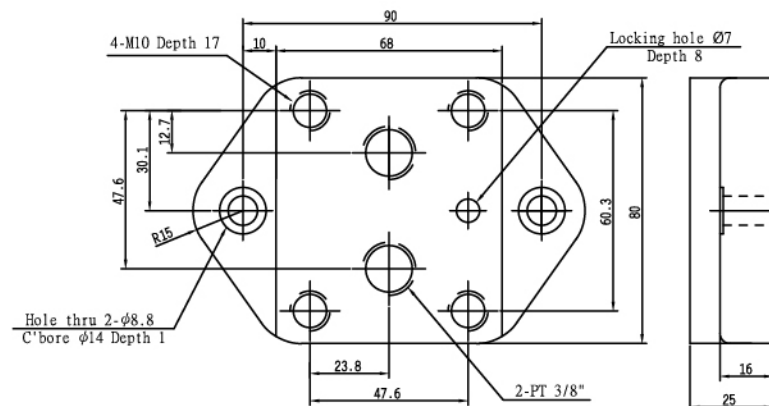

#### CRG-06-10

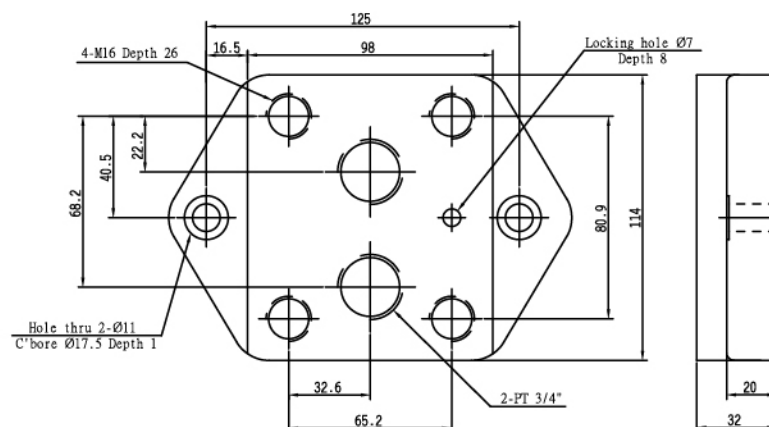


#### CRG-10-10

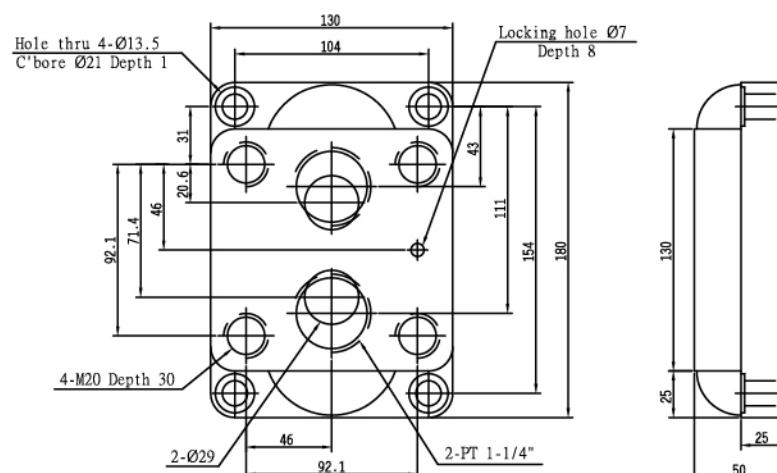


### ■ 安裝尺寸圖 Mounting data

#### CRG-03-20

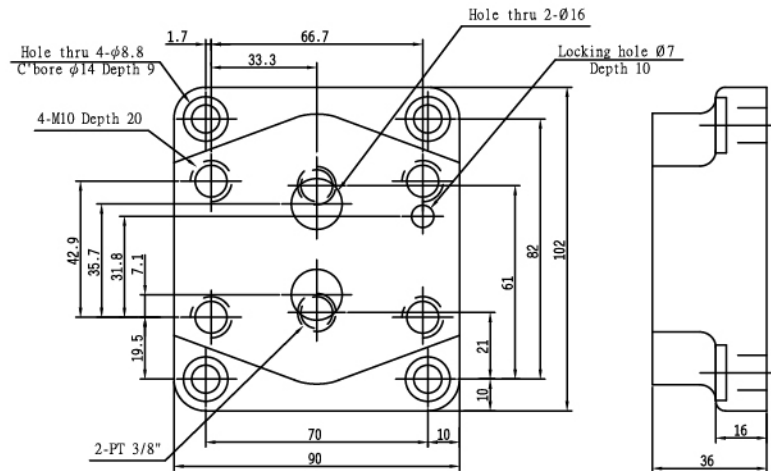

#### CRG-06-20

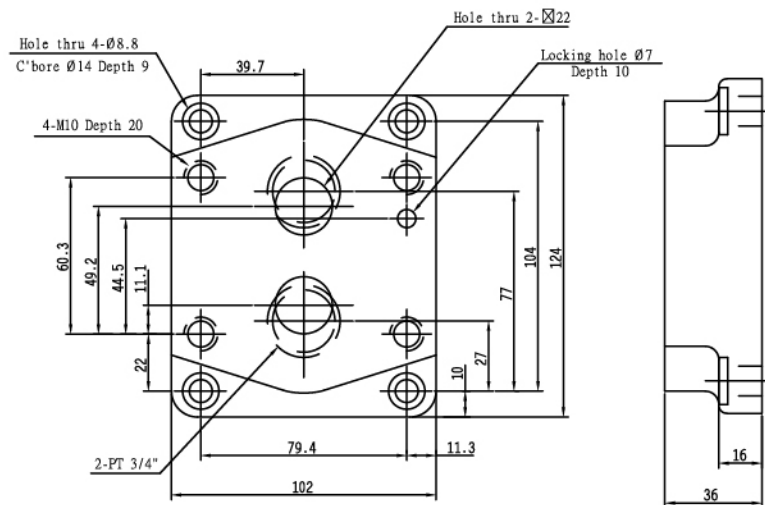

#### CRG-10-20

