


Vickers® by Danfoss

Proportional Directional Valves without Feedback



BC449974710886en-000102

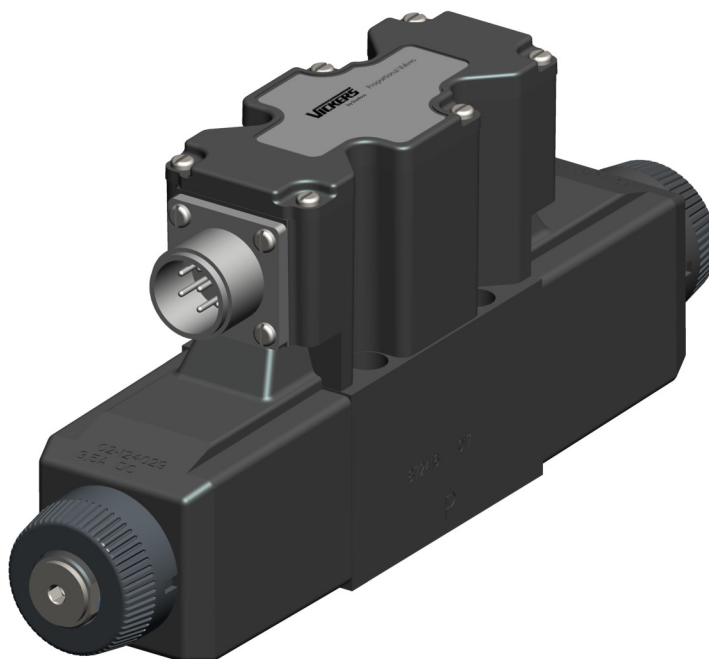

KBD/TG4V-3, 1* Series
Pressures to 350 bar (5000 psi)



This product has been designed and tested to meet specific standards outlined in the European Electromagnetic Compatibility Directive (EMC) 89/336/EEC, amended by 91/263/EEC, 92/31/EEC and 93/68/EEC, article 5. For instructions on installation requirements to achieve effective protection levels, see this leaflet and the *Installation Wiring Practices for Vickers® by Danfoss Electronic Products* leaflet 2468. Wiring practices relevant to this Directive are indicated by  Electromagnetic Compatibility (EMC).

Proportional Directional Valves without Feedback

Contents

General Description	Page 3
Typical Section	Page 3
Model Codes	Page 4
Spool Data	Page 5
Functional Symbols	Page 5
Operating Data	Page 6
Power Capacity Envelopes	Page 8
Flow Characteristics	Page 11
Frequency Response	Page 14
Installation Dimensions	
KBDG4V-3	Page 15
KBTG4V-3	Page 15
Parallel Flow Path Module	Page 16
Subplates and Mounting Surfaces	Page 16
Single Station Subplates	Page 17
Port Threads	Page 17
Mounting Surface Interface to ISO 4401 (Size 03)	Page 17
Electrical Information	
Block Diagram	Page 18
Typical Connection Arrangements	Page 19
Application Data	Page 20

Proportional Directional Valves without Feedback

General Description

Vickers™ by Danfoss KB*G4V-3 proportional valves are designed to provide controlled oil flow in proportion to an electrical command signal. They are available in two versions. Firstly a double solenoid version that will provide reversible flow and return to an actuator. Secondly a single solenoid version that provides a single direction of flow.

The KB* valve incorporates an integral control amplifier. Factory set adjustments for gain, spool deadband compensation and dither ensure excellent reproducibility valve-to-valve.

Electrical connection is via a standard 7-pin plug and requires a power supply and command signal which can be either voltage or current (model code option).

In addition to improving machine performance and life, the KB* proportional valves substantially simplify system design by combining direction and flow capabilities in one single package that mounts onto a standard ISO 4401 interface.


New Features and Benefits

- State of the art digital electronic technology
- Rugged and robust die-cast housing
- Optional voltage (+/-10 volt) or current (4-20 mA) demand input
- Adjustable ramp (0-12 sec)
- Wide range of supply voltage
- Optional external enable feature
- IP67 environmental protection
- Full CE electromagnetic capability to EN 50081-2 and EN 50082-2
- Vibration and shock tested

Standard Features and Benefits

- Factory adjusted to ensure excellent valve-to-valve reproducibility
- Installation wiring reduced and simplified
- Wide range of spool and flow rate options
- Simple valve removal and replacement for service i.e. plug and play
- Standard 7-pin connector
- 350 bar (5000 psi) pressure rating
- Supported by auxiliary function electronic modules

Typical Section

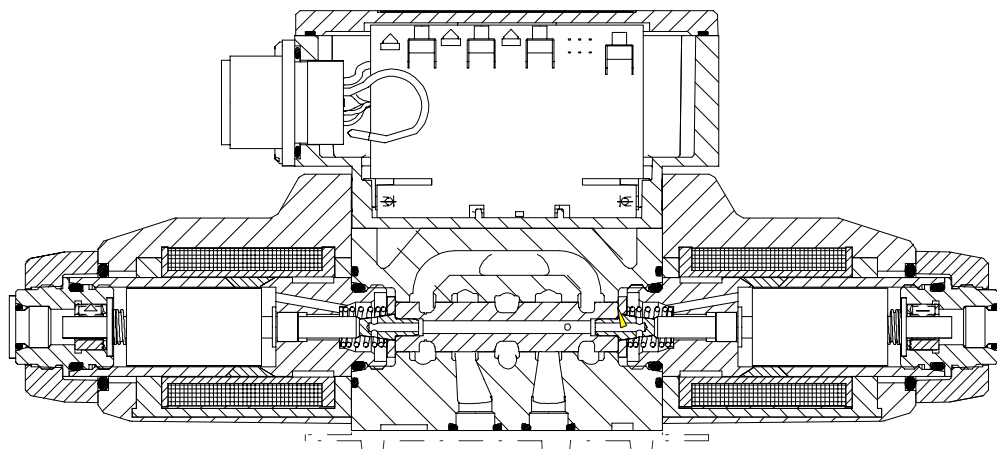


KB*G4V-3-P*7, 1* Series

Proportional Directional Valves without Feedback

Model Codes

KB * G 4 V 3 ** * ** * ** * (V) M * P*7 H 7 10



1 Valve Type

KB - Proportional valve with integral amplifier, B series

2 Control Type

D - Directional valve
T - Throttle valve

3 Mounting

G - Subplate mounted

4 Operation

4 - Solenoid operated

5 Pressure Rating

V - 350 bar (5000 psi), ports P, A & B

6 Interface

3 - ISO 4401, size 03-02-0-94, ANSI B93.7M-DO3

7 Spool Type

2 - Closed center
33 - P port closed, A & B to tank

8 Spool/Spring Arrangement

C - Spring centered, dual solenoid
B - Spring centered, single solenoid (solenoid "B" version only, solenoid "A" for "V" version)

9 Spool Flow Rating - at 5 bar (75 psi) per metering flow path

03 - 3 L/min (0.79 USgpm)
07 - 7 L/min (1.85 USgpm)
13 - 13 L/min (3.43 USgpm)
20 - 20 L/min (5.28 USgpm)
24 - 24 L/min (6.34 USgpm)

10 Spool Metering Type

N - Meter-in and meter-out
F - Fine meter-in and meter-out
S - Meter-out only

11 Flow Rating for Asymmetric Flow Spools

10 - 10 L/min (2.64 USgpm) (20N10 only)
- Omit for symmetrical spools

12 Manual Overrides

Blank - Plain overrides
H - Water resistant overrides
Z - No overrides

13 Solenoid Energization Identity

V - Solenoid "A" is at "A" port end, solenoid "B" is at "B" port end, independent of spool type
Blank - US ANSI B93.9 standard (energize solenoid "A", flow is P-A)

14 Electrical Command Option

1 - +/- 10V control signal
2 - 4-20 mA control signal

15 Electrical Connection

PC7 - 7-pin connector, without plug supplied
PE7 - 7-pin connector, with plug supplied
PH7 - As PE7 but with pin "C" used for enable signal
PR7 - As PC7 but with pin "C" used for enable signal

16 Coil Rating

H - 24V DC amplifier supply

17 T port Pressure

7 - 210 bar (3000 psi)

18 Design Number

1* series - Subject to change



Warning

Valves with integral amplifiers are supplied with or without the metal 7-pin plug. The Vickers™ by Danfoss plug, part no. 934939, must be correctly fitted to ensure that the EMC rating and IP67 rating are achieved. The plug retaining nut must be tightened with a torque of 2-2,5 Nm (1.5-2.0 lbf ft) to effect a proper seal.


Proportional Directional Valves without Feedback

Spool Data

Spool Symbols

Available Spools for KBDG4V-3


Spool type 2C**N, meter-in/meter-out




Spool type 2C20N10, asymmetric flow




Spool Type 2C24S, meter-out only



Spool type 33C**N, meter-in/meter-out




Spool type 33C20N10, asymmetric flow



Available Spools for KBTG4V-3

Spool type 2B**N, meter-in/meter-out



Spool type 33B**N, meter-in/meter-out



Spool Types and Flow Ratings

Symmetric Spools

Base line starting at $\Delta p = 5$ bar (75 psi) per metering flow path, e.g. B to T. For actual maximum flow refer to power capacity envelope curves.

Spool Code	Spool Symbol	Flow Rating
For KBDGV - 3 valves:		
2C03F	2C	3 L/min (0.79 USgpm)
2C07N	2C	7 L/min (1.85 USgpm)
2C13N	2C	13 L/min (3.43 USgpm)
2C20N	2C	20 L/min (5.28 USgpm)
2C24S	2C	24 L/min (6.34 USgpm)
33C03F	33C	3 L/min (0.79 USgpm)
33C07N	33C	7 L/min (1.85 US gpm)
33C13N	33C	13 L/min (3.43 USgpm)
33C20N	33C	20 L/min (5.28 US gpm)

For KBTG4V - 3 valves:

2B03F	2B	3 L/min (0.7 USgpm)
2B07N	2B	7 L/min (1.85 USgpm)
2B13N	2B	13 L/min (3.43 USgpm)
2B20N	2B	20 L/min (5.28 USgpm)

Asymmetric Spools


Figure preceding metering type designator, "N" (e.g. 2C***N) is flow rating P-A, or A-T ("A" port flow); figure after "N" (N***) is flow rating P-B, or B-T ("B" port flow).

Spool Code	Spool Symbol	Flow Rating
For KBDG4V - 3 valves:		
2C20N10	2C	20 L/min (5.28 USgpm), "A" port flow 10 L/min (2.64 USgpm), "B" port flow
33C20N10	33C	20 L/min (5.28 USgpm), "A" port flow 10 L/min (2.64 USgpm), "B" port flow

Functional Symbols


Model Type KBDG4V-3

Proportional directional valve (with integrated electronics)

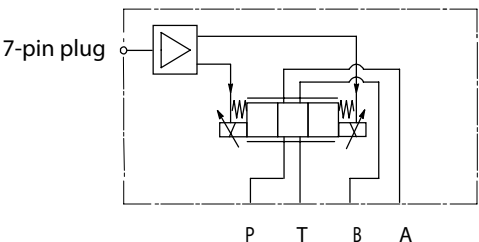


Model Type KBTG4V-3

Proportional throttle valve (with integrated electronics)

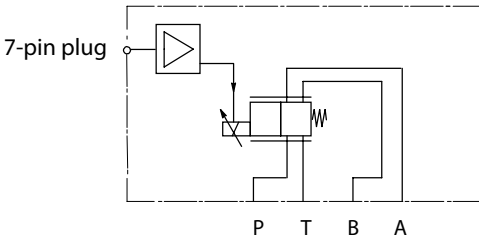

Proportional Directional Valves without Feedback

Operating Data

KBD/TG4V-3 Valves with integral amplifier. Data is typical with fluid at 36 cSt (168 SUS) and 50°C (122°F).																		
Power supply (24V)	(Model code 16 H)	24V DC (21V to 36V including 10% peak-to-peak ripple) max current - 1.2A																
Command signal (Volts)		0 to +10V DC, or 0 to -10V DC, or -10V to +10V DC																
Input impedance		47 kΩ																
Common mode voltage to pin B	(Model code 14 1)	4V																
Command signal (Current)		4 to 20 mA																
Input impedance	(Model code 14 2)	100Ω																
Valve enable signal																		
Enable		>9.0V (36V max)																
Disable		<2.0V																
Input impedance		36 kΩ																
7-pin plug connector		<table><tr><td>Pin</td><td>Description</td></tr><tr><td>A</td><td>Power supply positive (+)</td></tr><tr><td>B</td><td>Power supply 0V and current command return</td></tr><tr><td>C</td><td>Valve enable (PH7 & PR7)</td></tr><tr><td>D</td><td>Command signal (+V or current in)</td></tr><tr><td>E</td><td>Command signal (-V or current GND)</td></tr><tr><td>F</td><td>Output monitor</td></tr><tr><td>G</td><td>Protective ground</td></tr></table>	Pin	Description	A	Power supply positive (+)	B	Power supply 0V and current command return	C	Valve enable (PH7 & PR7)	D	Command signal (+V or current in)	E	Command signal (-V or current GND)	F	Output monitor	G	Protective ground
Pin	Description																	
A	Power supply positive (+)																	
B	Power supply 0V and current command return																	
C	Valve enable (PH7 & PR7)																	
D	Command signal (+V or current in)																	
E	Command signal (-V or current GND)																	
F	Output monitor																	
G	Protective ground																	
		View of pins of fixed half																
Electromagnetic compatibility (EMC):																		
Emission (10 V/m)		EN 50081-2																
Immunity (10 V/m)		EN 50082-2																
Monitor signal (pin F) KBD valves		0 to 5V (0.39V/A 24V power supply)																
Output impedance		10kΩ																
Step input response with flow through P-A-B-T Δp=5 bar (75 psi) per metering path, e.g. P-A Required flow step for 24V (H) version: 0 - 100% 100% - 0 +90% to -90%		Time to reach 90% of required step: 26 ms 35 ms 40 ms																
Reproducibility, valve-to-valve (at factory settings: Flow at 100% command signal		≤5%																
Protection:																		
Electrical		Reverse Polarity Protected																
Environmental		IEC 529, Class IP67																
Ambient air temperature range for full performance		0°C to 70°C (23°F to 158°F)																
Oil temperature range for full performance		0°C to 70°C (23°F to 158°F)																
Minimum temperature at which valves will work at reduced performance		-20°C (-4°F)																
Storage temperature range		-25°C to 85°C (-13°F to +185°F)																
Supporting products:																		
Auxiliary electronic modules (DIN-rail mounting):																		
EHA-CON-201-A2* Signal converter		See catalog 2410A																
EHD-DSG-201-A-1* Command signal generator		See catalog 2470																
EH-RMP-201-A-2* Ramp generator		See catalog 2410A																
EHA-PID-201-A-2* PID controller		See catalog 2427																
EHA-PSU-201-A-10 Power supply		See catalog 2410A																





Proportional Directional Valves without Feedback

Operating Data (cont.)

Ramp time	0-12 sec for full step input (0-100%)
Relative duty factor	Continuous rating (ED = 100)
Hysteresis with flow through P-A-B-T	>8% of rated flow
Mass: KBDG4V-3 KBTG4V-3	2,7 kg (5.9 lb) approx. 1,9 kg (4.2 lb) approx.



Proportional Directional Valves without Feedback

Power Capacity Envelopes

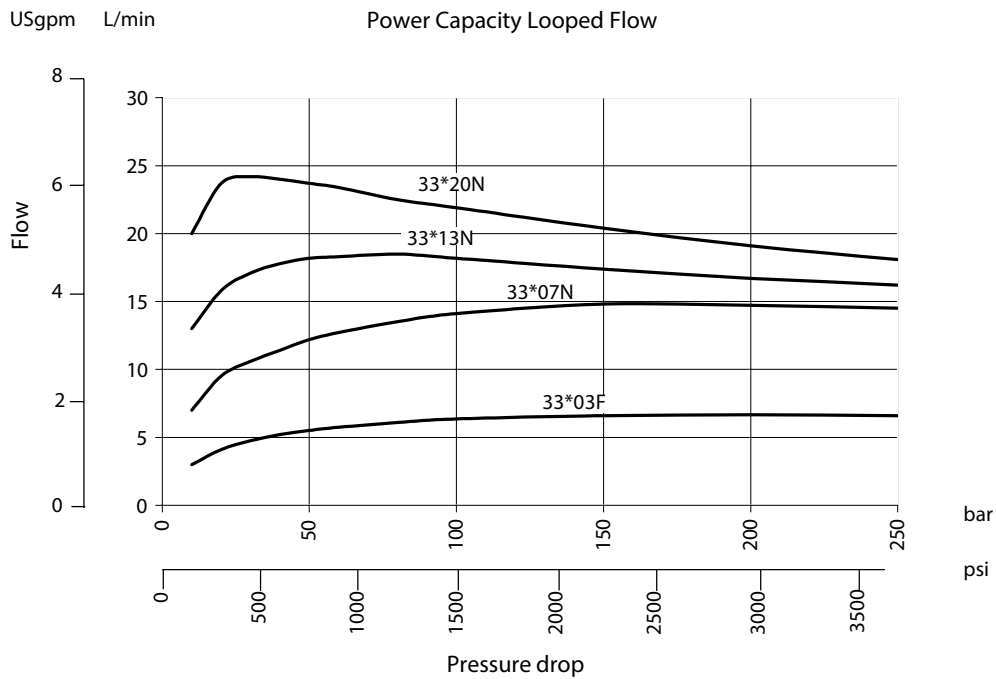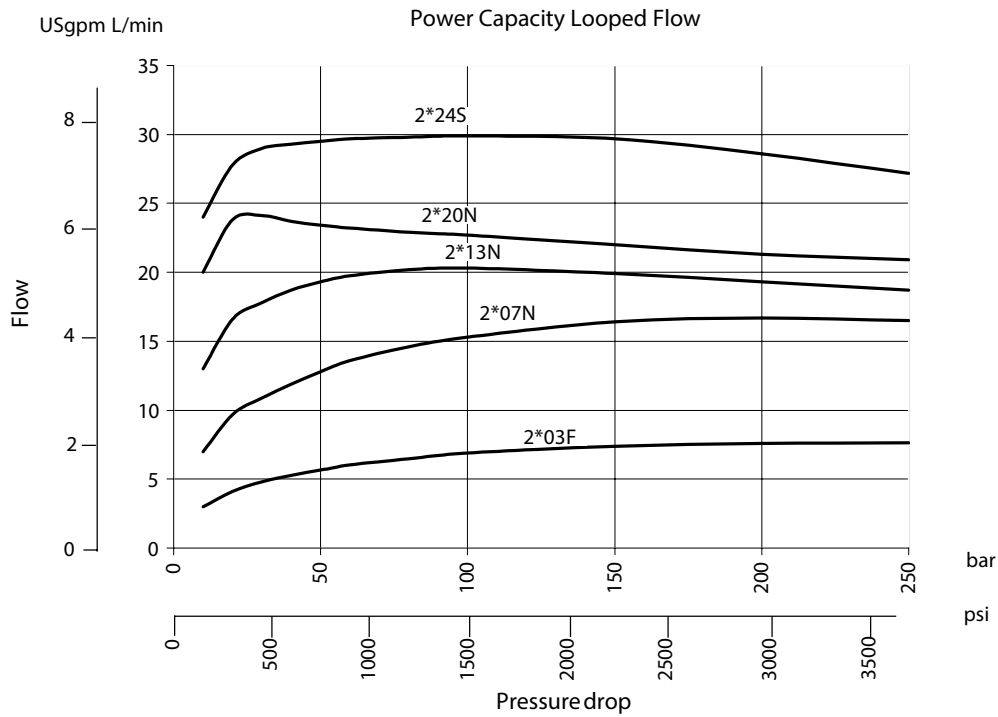


Proportional Directional Valves without Feedback

Power Capacity Envelopes (cont.)

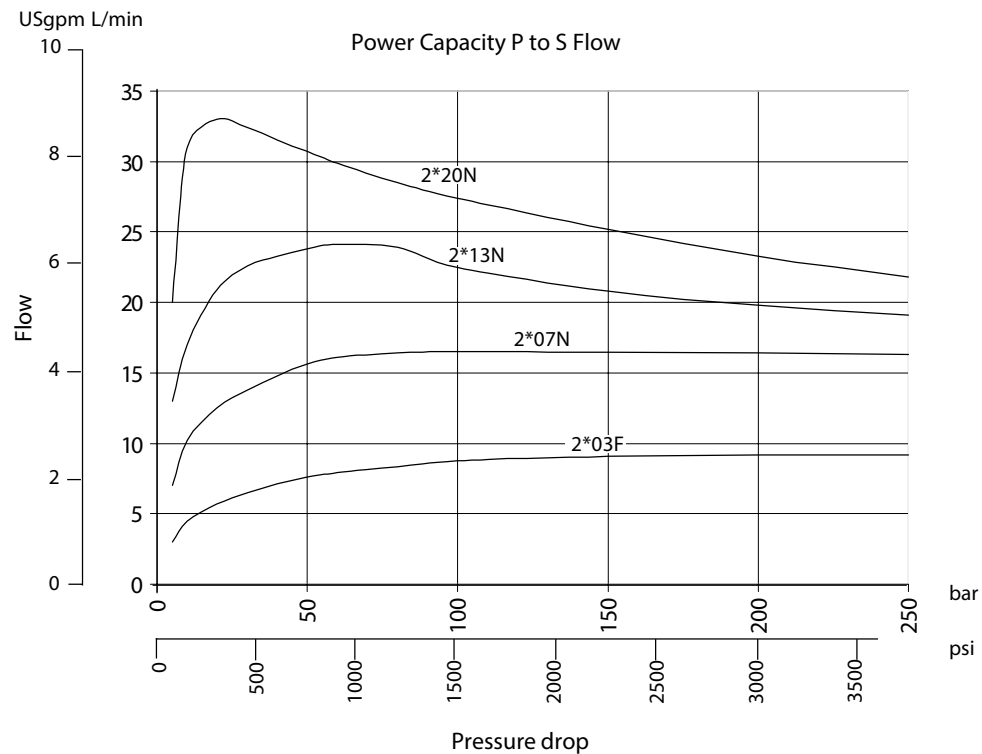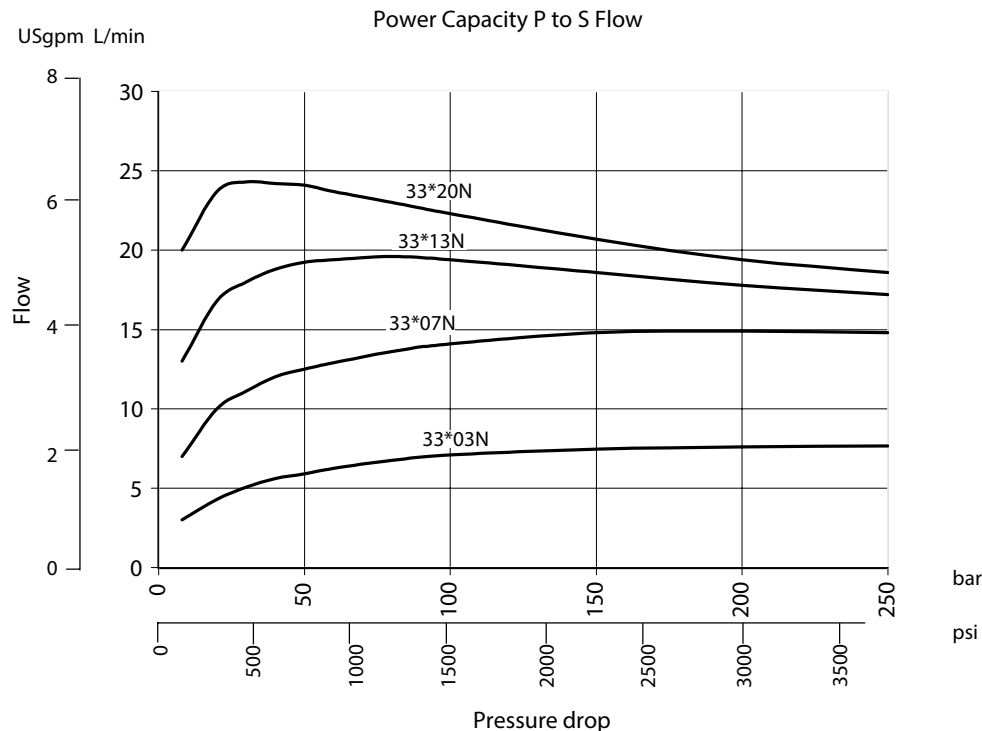

Proportional Directional Valves without Feedback

Power Capacity Envelopes (cont.)

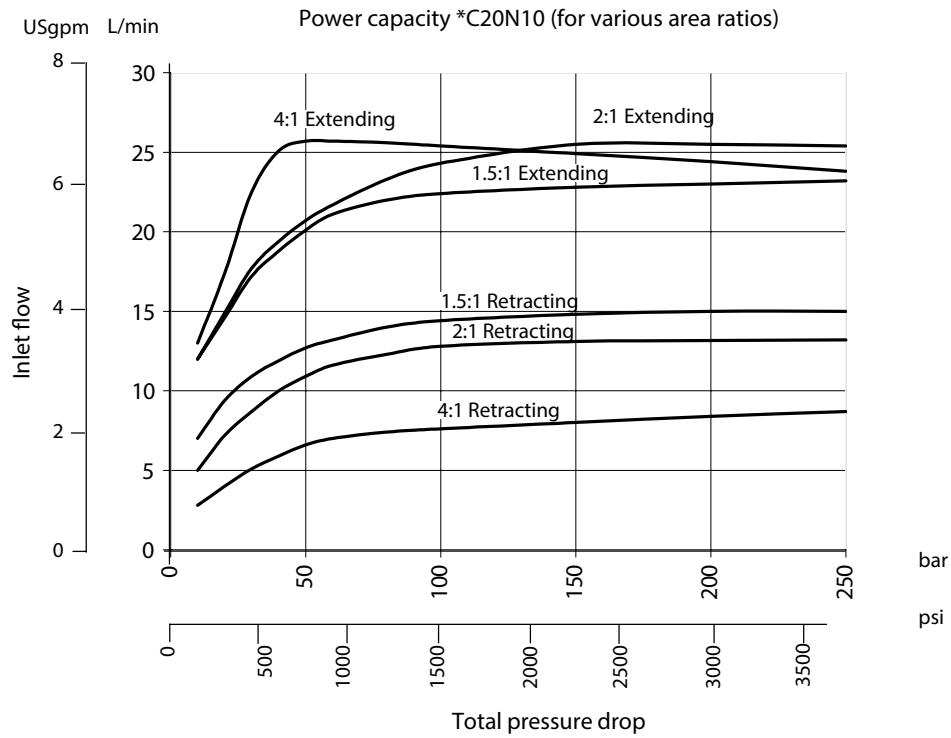





Proportional Directional Valves without Feedback

Flow Characteristics

KBD/TG4V-3
Spool types as noted

KB valves are preset at the factory to compensate
for the effect of spool overlap.

Looped flow at $\Delta p = 10$ bar (144 psi)

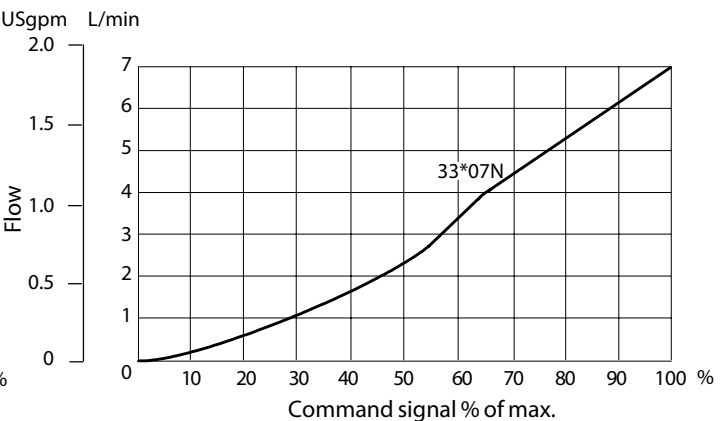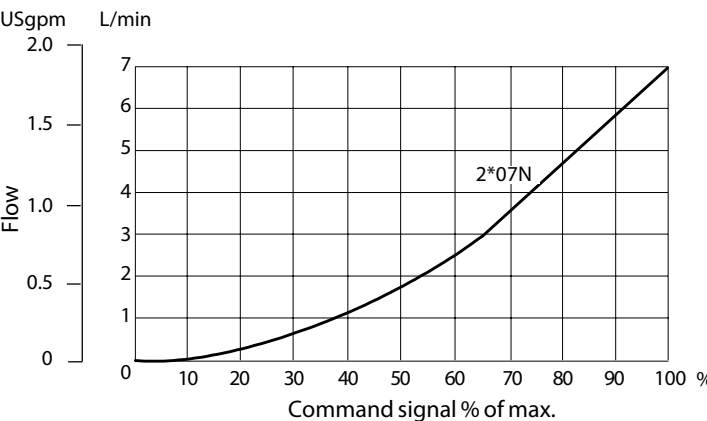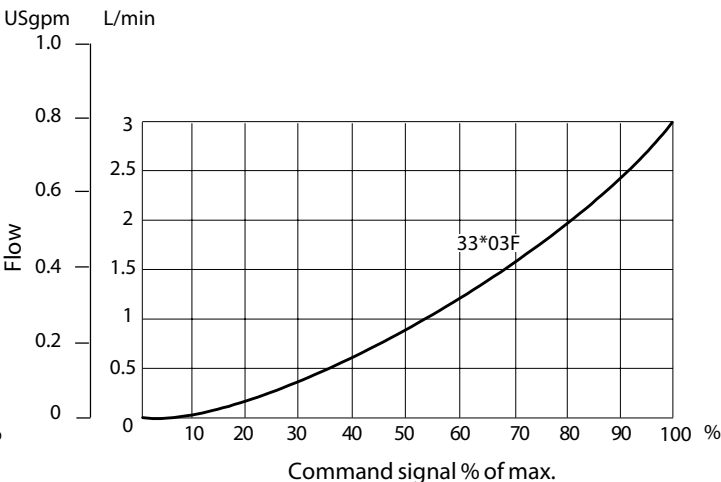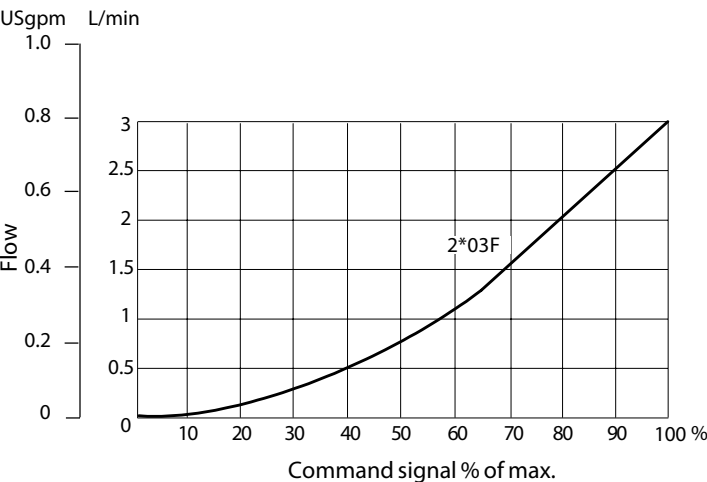

Proportional Directional Valves without Feedback

Flow Characteristics (cont.)


KBD/TG4V-3

Spool types as noted


Looped flowpath at $\Delta p = 10$ bar (144 psi)

KB valves are preset at the factory to compensate for the effect of spool overlap.


USgpmL/min

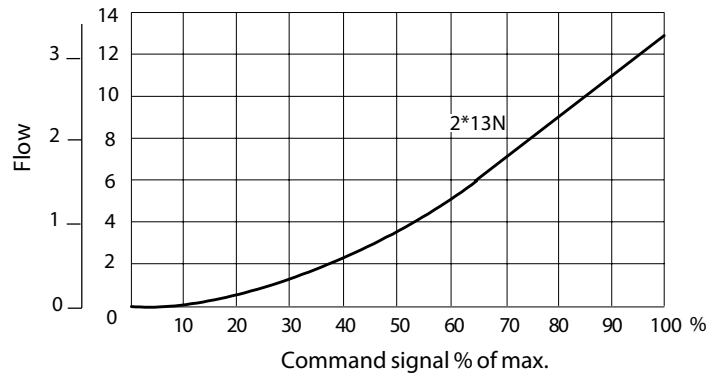


USgpm L/min

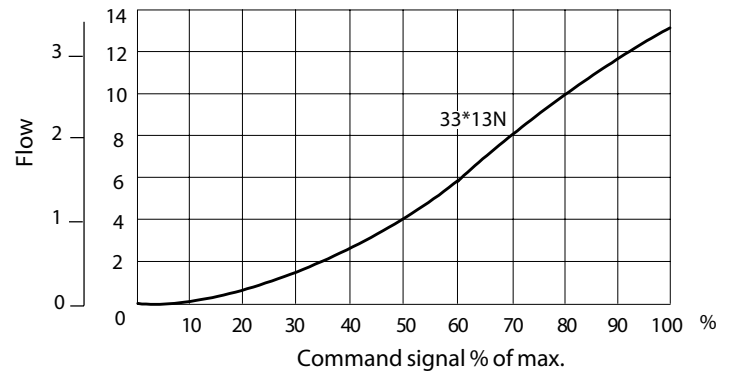

USgpmL/min

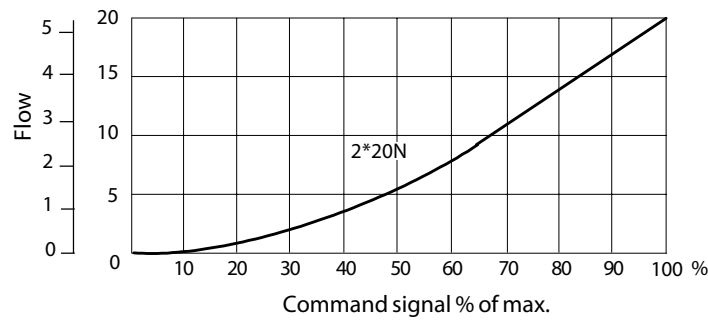

USgpm L/min

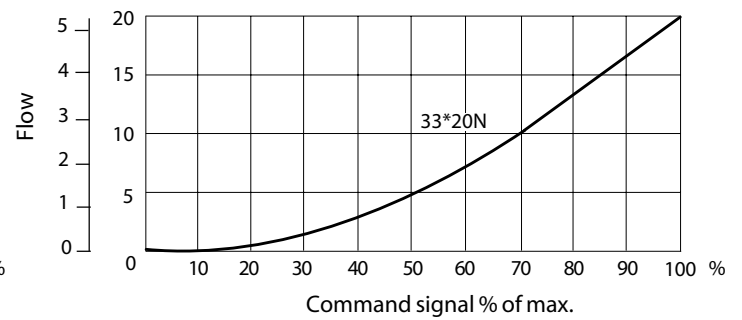




Proportional Directional Valves without Feedback

Flow Characteristics (cont.)

KBD/TG4V-3
Spool types as noted

KB valves are preset at the factory to compensate for the effect of spool overlap.



Looped flowpath at $\Delta p = 10$ bar (144 psi)

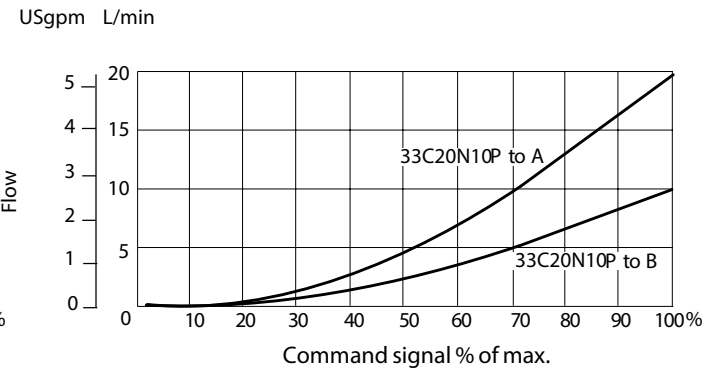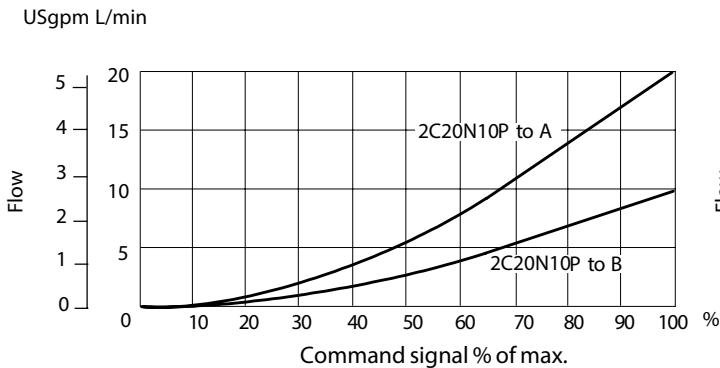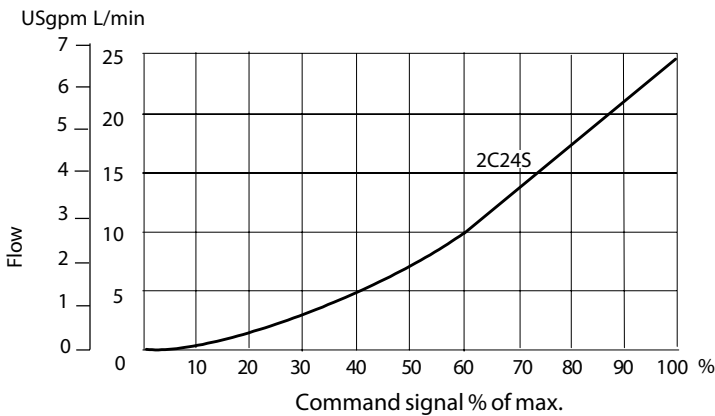

Proportional Directional Valves without Feedback

Frequency Response (Typical)



For an amplitude of $\pm 25\%$ max. stroke about the 50% position, at Δp (P-B) = 5 bar (75 psi)

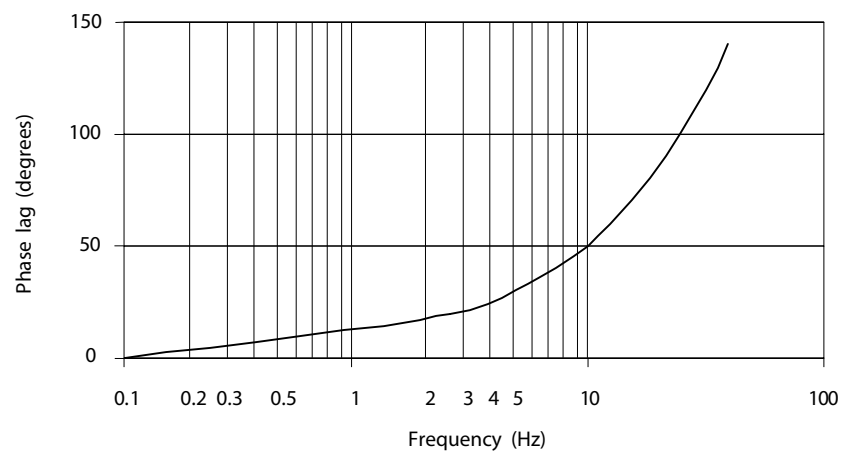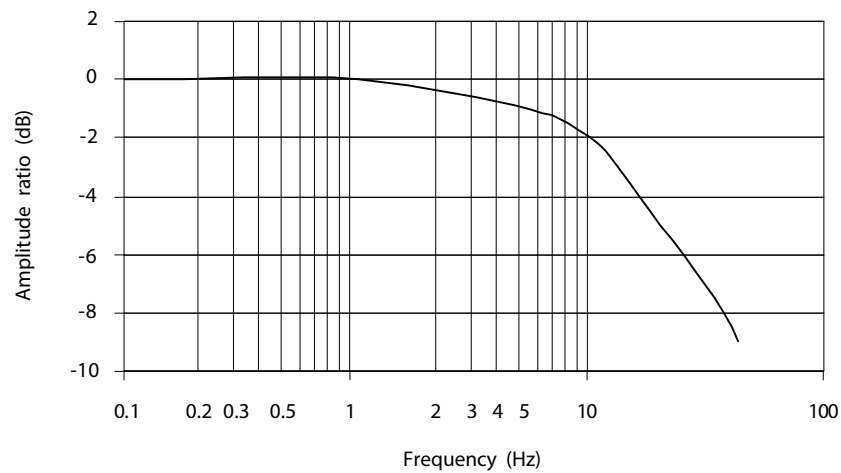


Proportional Directional Valves without Feedback

Installation Dimensions in mm (inches)

KBDG4V-3

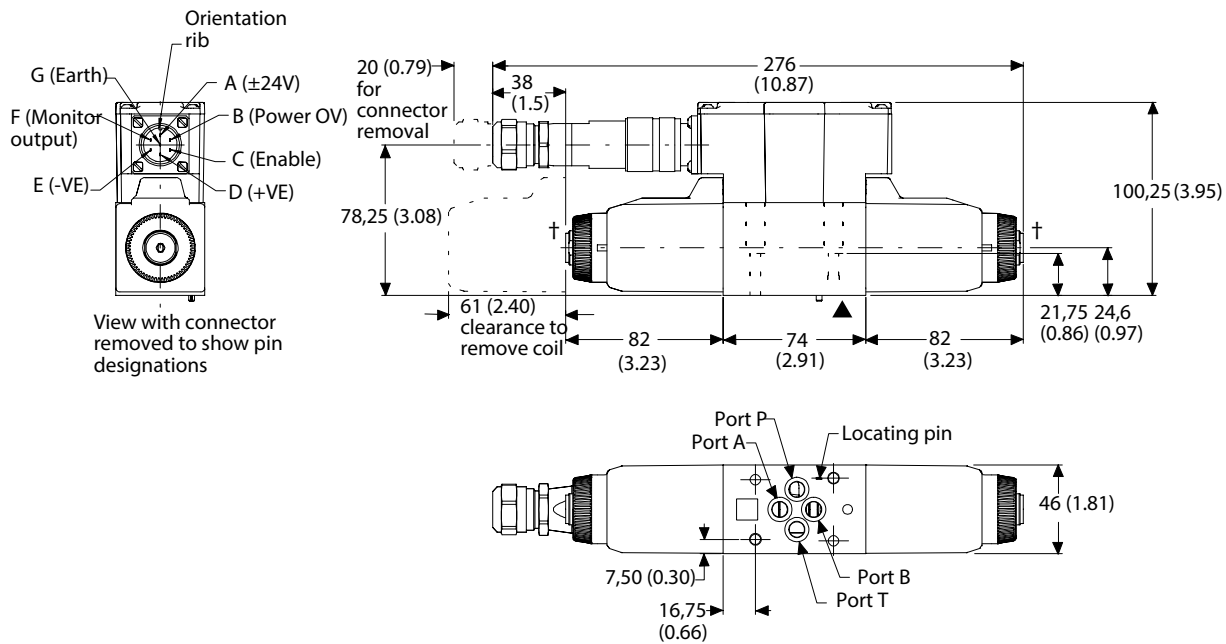

KBTG4V-3

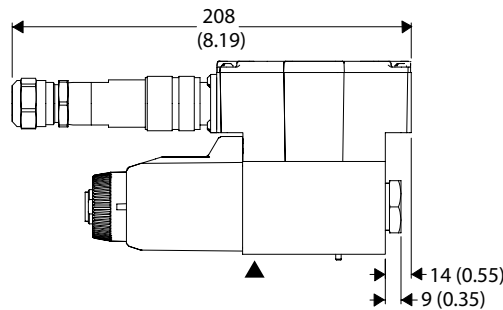

Warning

Valves with integral amplifiers are supplied with or without the metal 7-pin plug. The Vickers™ by Danfoss plug, part no. 934939, must be correctly fitted to ensure that the EMC rating and IP67 rating are achieved. The plug retaining nut must be tightened with a torque of 2-2,5 Nm (1.5-2.0 lbf ft) to effect a proper seal.

▲ Mounting surface seals supplied

† Note: Bleed screw locations. Air bleed: torque to 6,5-7,5 Nm (57-66 lbf ft).

NOTE: For optimum valve operation, bleed the air from the proportional solenoids at initial start-up. This may be done as follows

- Remove the bleed screws until no bubbles appear and then reinstall bleed screws, or...
- Remove both bleed screws, and use a standard oil can nozzle to pump fluid in one side until it flows, free of air bubbles, out the other side. Reinstall screws.


If there is no inherent back pressure in the tank port of the circuit, do not allow the tank line to empty. This may be prevented by installing a check valve in the tank line. The cracking pressure of the check valve should be in the range of 1.5-3 bar (22-45 psi).

Proportional Directional Valves without Feedback

Installation Dimensions in mm (inches)


Parallel Flow Path Module

Size 03 Parallel-Flow-Path Module
KDGMA-3-616265-1*



Typically used for doubling effective flow capability of single solenoid proportional valves (throttle valves).

▲ A, T_A and T_B ports at subplate face are blind holes fitted with O-seals.

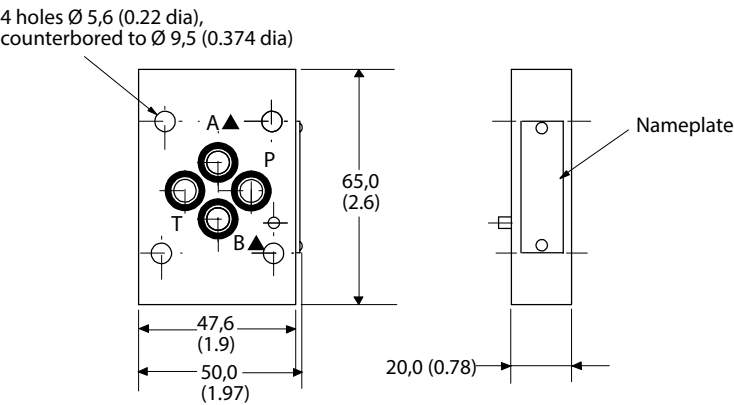

Subplates and Mounting Surfaces

General Description

If a subplate is not used a machined pad must be provided for valve mounting. Pad must be flat within 0,0127 mm (.0005 inch) and smooth within 1,6 µm (63 microinch). Mounting bolts, when provided by customer, should be ISO 898 class 12.9 or better.

Dimensional Tolerances

Dimensional tolerance on interface drawings is ±0,2 mm (±0.008") except where otherwise stated. ISO 4401 specifies inch conversion to ±0.01".

Conversion from Metric

ISO 4401 gives dimensions in mm. Inch conversions are accurate to 0.01" unless otherwise stated.

Mounting Bolt Tappings

ISO 4401 gives metric thread tappings. Alternate UNC tappings are recommendations that allow these plates and associated valves to be used up to their maximum pressures, when using recommended Vickers™ by Danfoss bolt kits, or bolts of an equivalent strength. It is recommended that customers' own manifold blocks for UNC bolts should be tapped to the minimum depths given in the footnotes.

Subplates

Description and Mass kg (lb)	Functional Symbol	Model Code	Max. Pressure
Single-station subplate; Rear ports P, T, A, B Cast iron 1,3 (2.9)		KDVGM-3-1*-R▲ KDVGM-3-676803-1* (SAE/UNF ports)	250 bar (3600 psi)


* Design number subject to change. No change of installation dimensions for design numbers 10 to 19 or 21 to 29 inclusive.

▲ "S" suffix = SAE/UNC ports and/or UNC fixing bolt tappings and/or orifice plugs as appropriate.
"R" suffix = BSPF and/or metric fixing bolt tappings and/or orifice plugs as appropriate.

Proportional Directional Valves without Feedback

Installation Dimensions in mm (inches)

Single-Station Subplates

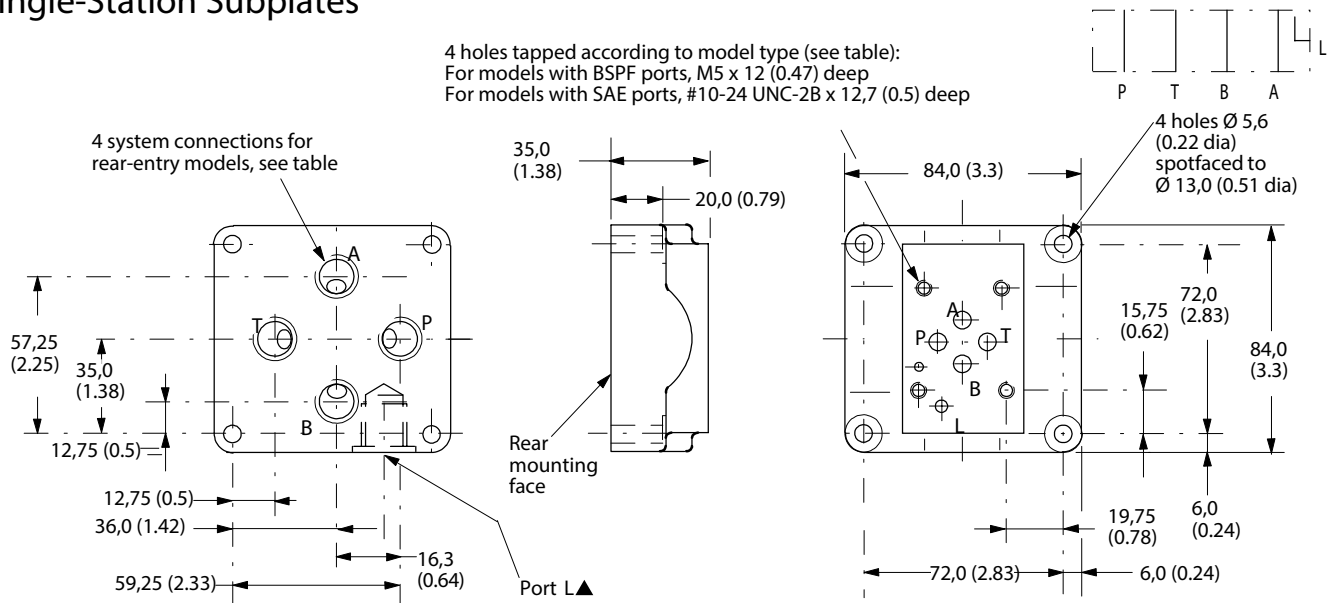

Port Threads

Model	Ports P, T, A, B	Port L
BSPF ports/M5 mounting bolts: KDVGM-3-1*-R	Rear G 3/8" (3/8" BSPF) x 12,0 (0.47) deep	G 1/8" (1/8" BSPF) x 12,0 (0.47) deep
SAE ports/#10-24 UNC mounting bolts: KDVGM-3-676803-1*	Rear 3/4" - 16 UNF-2B x 14,3 (0.56) deep (SAE)	7/16" - 20 UNF-2B x 11,6 (0.46) deep (SAE)

▲ 11,5 (0.45) from rear mounting face to port centerline.

Mounting Surface to ISO 4401 (Size 03)

This interface conforms to:

ISO 4401-03-02-0-94

plus location pin hole


ANSI/B93.7M (and NFPA) size 03

CETOP R35H4.2-4-03, plus location

pin hole

DIN 24340 Form A6 plus location

pin hole

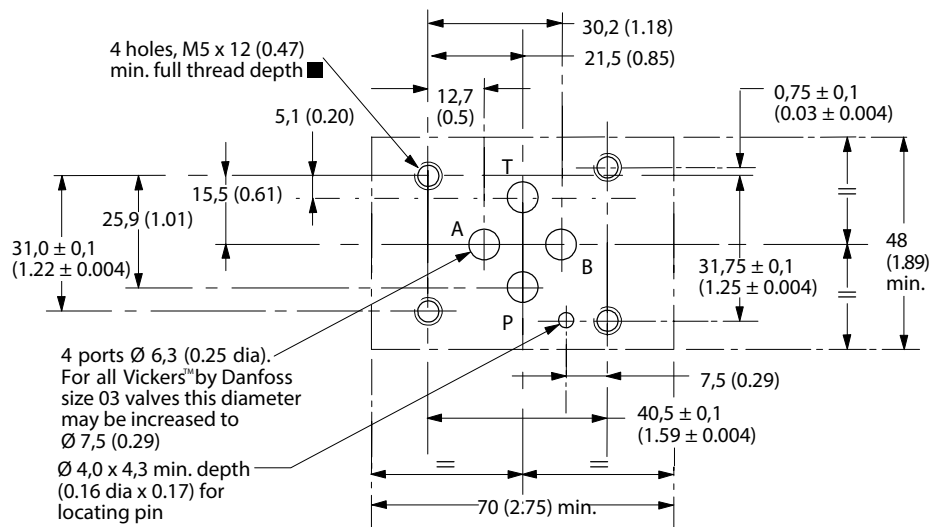

■ #10-24 UNC-2B optional.

Proportional Directional Valves without Feedback

Electrical Information

Block Diagram

KBD/TG4V-3

Command Signals and Outputs

7 - pin plug			Flow Direction	
Command = Volts ($\pm 10V$)	Pin D	Pin E	P to A	
	Positive	OV		
	OV	Negative		
	$V_D - V_E = \text{Positive}$		P to B	
	Negative	OV		
	OV	Positive		
	$V_D - V_E = \text{Negative}$			

Command= Current (4-20 mA)	Pin D	Pin E	Pin B	Flow Direction
	more than 12 mA	Current GND	Current Return	P to A
	less than 12 mA	Current GND	Current Return	P to B

Wiring

Connections must be made via the 7-pin plug mounted on the amplifier. See this leaflet and Installation Wiring Practices for Vickers™ by Danfoss Electronic Products leaflet 2468. Recommended cable size are:

Power cables:

For 24V supply:

0,75 mm²(18 AWG) up to 20m (65 ft)

1,00 mm²(16 AWG) up to 40m (130 ft)


Signal cables:

0,50 mm²(20 AWG)

Screen (shield):

A suitable cable would have 7 cores, a separate screen for the signal wires and an overall screen. Cable outside diameter 8,0-10,5 mm (0.31-0.41 inches)

See connection diagram on next page.

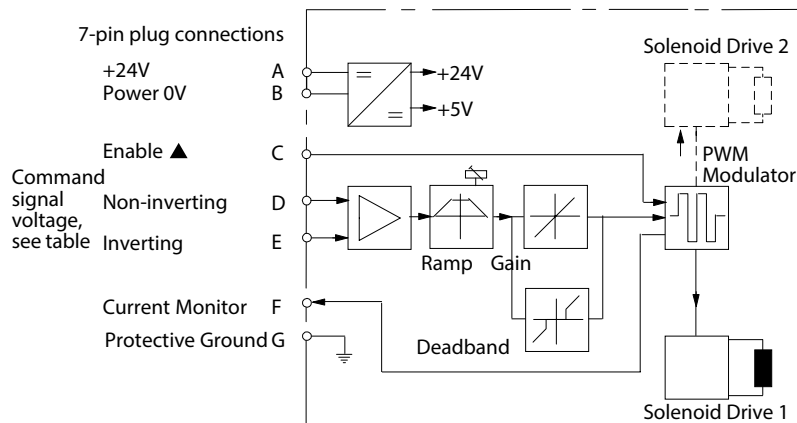

▲ In valves with PH7 or PR7 type electrical connection.




Warning

All power must be switched off before connecting or disconnecting any plugs.


Proportional Directional Valves without Feedback

Typical Connection Arrangements

Wiring Connections

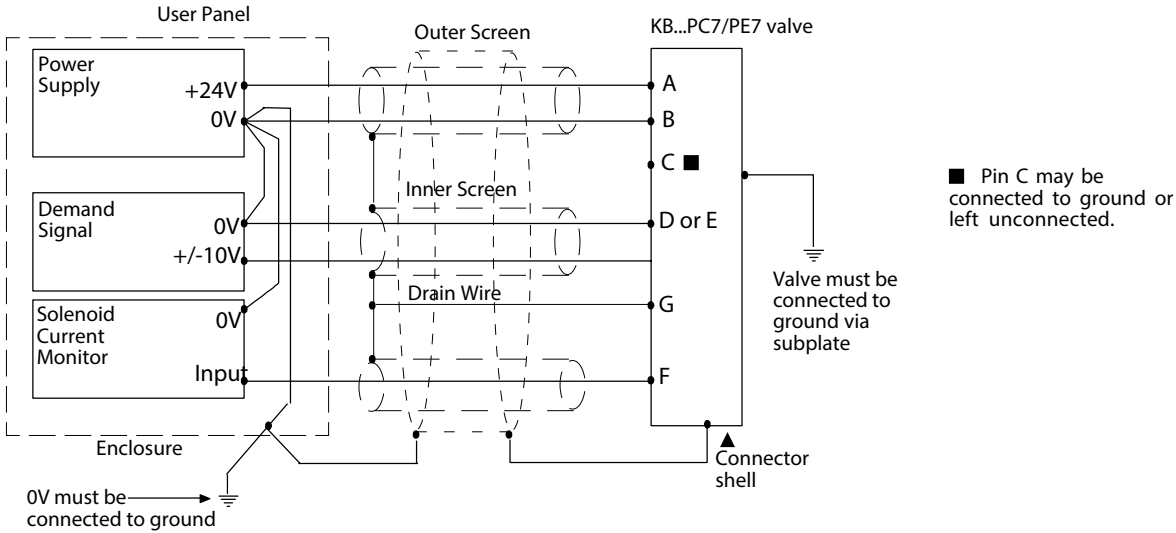

Wiring Connections for Valves with "Enable" Feature

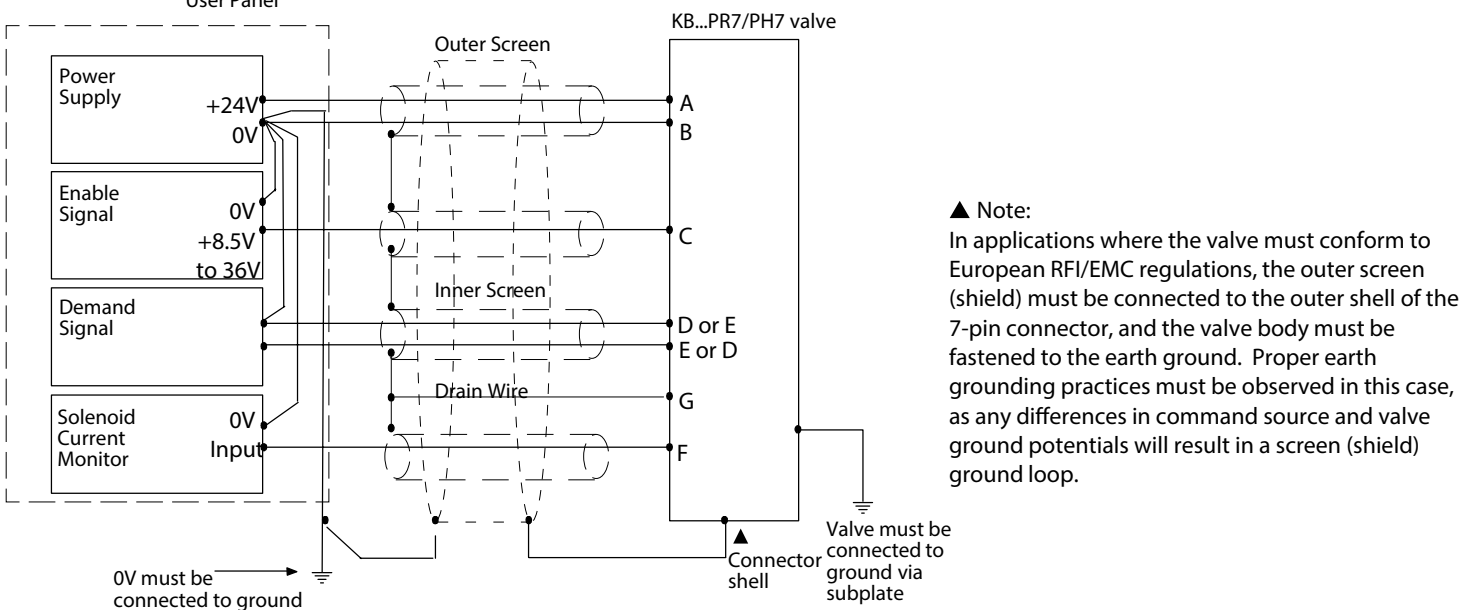

Warning

Electromagnetic Compatibility (EMC)

It is necessary to ensure that the valve is wired up as above. For effective protection the user electrical cabinet, the valve subplate or manifold and the cable screens should be connected to efficient ground points. The metal 7-pin connector part no. 934939 should be used for the integral amplifier. In all cases both valve and cable should be kept as far away as possible from any sources of electromagnetic radiation such as cables carrying heavy current, relays and certain kinds of portable radio transmitters, etc. Difficult environments could mean that extra screening may be necessary to avoid the interference. It is important to connect the 0V lines as shown above. The multi-core cable should have at least two screens to separate the demand signal and monitor output from the power lines.

The enable line to pin C should be outside the screen which contains the demand signal cables.

Proportional Directional Valves without Feedback

Application Data

Fluid Cleanliness

Proper fluid condition is essential for long and satisfactory life of hydraulic components and systems. Hydraulic fluid must have the correct balance of cleanliness, materials and additives for protection against wear of components, elevated viscosity and inclusion of air.

Recommendations on contamination control methods and the selection of products to control fluid condition are included in publication 9132 or 561, "Guide to Systemic Contamination Control". The book also includes information on the concept of "ProActive Maintenance". The following recommendations are based on ISO cleanliness levels at 2 µm, 5 µm and 15 µm.

For products in this catalog the recommended levels are:

0 to 70 bar (1000 psi).....	18/16/13
70 + bar (1000 + psi).....	17/ 15/12

Vickers™ by Danfoss products, as any components, will operate with apparent satisfaction in fluids with higher cleanliness codes than those described. Other manufacturers will often recommend levels above those specified.

Experience has shown, however, that life of any hydraulic components is shortened in fluids with higher cleanliness codes than those listed above. These codes have been proven to provide a long trouble-free service life for the products shown, regardless of the manufacturer.

Hydraulic Fluids

Materials and seals used in these valves are compatible with antiwear hydraulic oils, and with non-alkyl-based phosphate esters.

The extreme operating viscosity range is 500 to 13 cSt (2270 to 70 SUS) but the recommended running range is 54 to 13 cSt (245 to 70 SUS).

Installation

The proportional valves in this catalog can be mounted in any attitude, but it may be necessary in certain demanding applications, to ensure that the solenoids are kept full of hydraulic fluid. Good installation practice dictates that the tank port and any drain port are piped so as to keep the valves full of fluid once the system start-up has been completed.

Mounting Bolt Kits

BK02-156493M (metric)

BK590716 (inch)

If not using recommended Vickers™ by Danfoss bolt kits, bolts used should be to ISO 898, 12.9 or better.

Seal Kit

02-351111

Plugs

7-pin plug (metal) 934939

7-pin plug (plastic) 694534

(Metal plug must be used for full EMC protection)

Note: an alternative metal connector which gives EMC protection but not IP67 rating is available from ITT-Cannon, part number CA06-COM-E-14S-A7-P.

Service Information

The products from this range are preset at the factory for optimum performance; disassembling critical items would destroy these settings. It is recommended that if any mechanical or electronic repair is necessary, valves should be returned to the nearest Danfoss Hydraulics repair center. The products will be refurbished as necessary and retested to specification before return.

Field repair is restricted to the replacement of the seals.

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.