



Manual Lever/Cam/Plunger Operated Directional Valve

DG3/17/18/20/21-3 60 Design

Danfoss directional valves offer versatility of application for the many directional control requirements of hydraulic machinery. Ruggedness of design, manufacturing quality, and worldwide parts and service availability maximize uptime, resulting in greater profits for your company.

Manual Lever/Cam/Plunger Valves

These valves are available in an NFPA D03 interface.

These valves are rated at flows to 75 l/min (20 USgpm) and 350 bar (5000 psi) maximum pressure. Roller cam, plunger, spring offset, detented, spring centered, knob or lever operated models are available.

Air Operated

Available in an NFPA D03 interface with rated flows to 75 l/min (20 USgpm) and maximum pressure of 350 bar (5000 psi).

Hydraulic Pilot Operated


Available in an NFPA D03 interface. Valves are rated at flows to 151 l/min (40 USgpm) and maximum pressure of 350 bar (5000 psi)

- Low-shock characteristics to maximize machine life
- Choice of five types of control to satisfy applications where electrical control is not appropriate


Feature and Benefits

- High pressure and flow capability for maximum cost-effectiveness
- Low head loss to minimize power loss

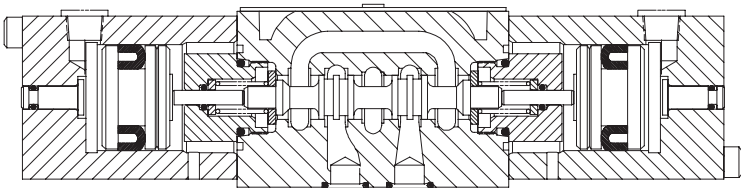
DG18V-3-* - 60
Air Operator




DG3V-3-* - 60
Hydraulic Operator

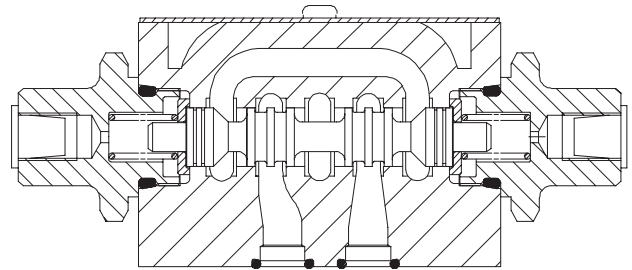


DG17V-3-* - 60
Lever Operator

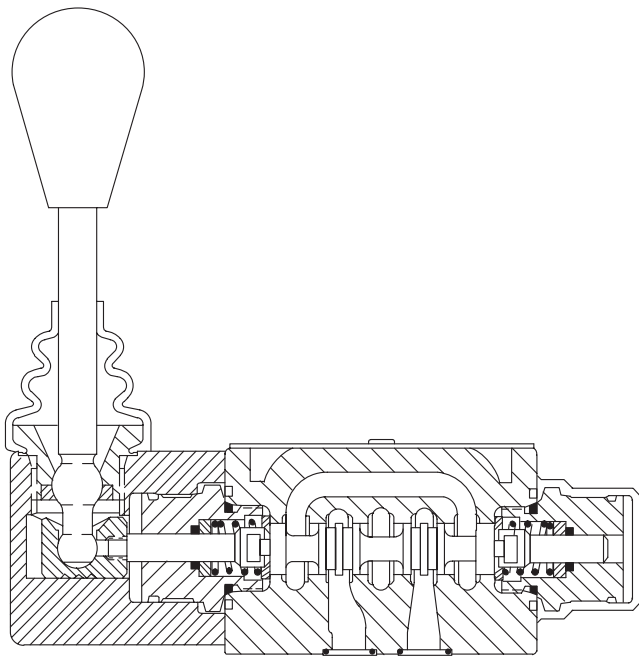

DG21V-3-* - 60
Plunger Operator

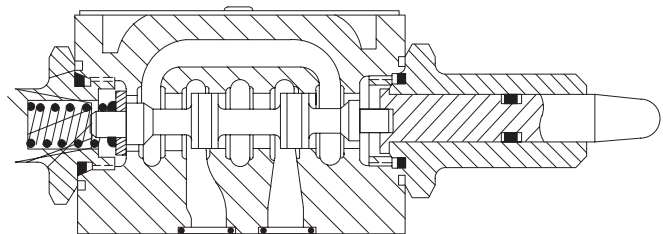

DG20V-3-* - 60
Cam Operator

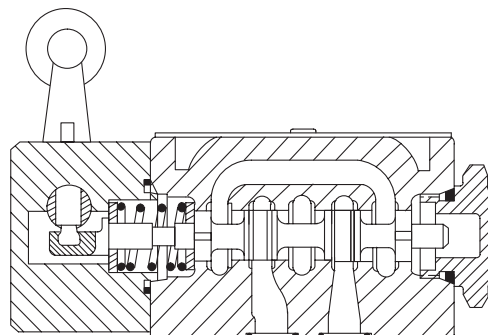

General Information

General Description

Five types of valve are available with different controls primarily for controlling the starting, stopping and direction of fluid flow in a system.

The valves are developed from the well-known series of DG4V-3-60 series solenoid operated valves (see Danfoss literature # GB-C-2015). These manual valves are available with a choice of up to nine different spool types, depending on valve configuration. All spools have been designed to provide good low-shock characteristics. External regulation of the control input by hydraulic, lever, pneumatic, cam or plunger operation allows matching to virtually any requirement where electrical control is not appropriate.

Models include no-spring, spring offset, spring centered and detented versions.

DG3V-3-*-60 Hydraulic Operated

The hydraulic operated DG3V-3-*-60 directional valves are used to control the direction of flow in a hydraulic circuit, which would control the movement of a work cylinder or the rotation of a fluid motor.

DG**V-3-*-60 Lever/Cam/Plunger Operated

Operating Information

The DG21V-3 plunger operator valves are internally drained to port T. They may be used only when surges or back pressure in the tank line cannot overcome the force applied to depress the plunger.

DG17/20/21 models must be released from actuated positions, without restriction to ensure proper spring return.

Manual lever and cam operations must be released from their actuated positions, without any restrictions to spring return.

Cam operated directional control valve installation recommendations:

- Maximum cam angle 35°
- Cam travel for dead band of 9° 30' on either side of center for closed center spools for 35° cam.
- This dead band should be taken into consideration when designing cam and system circuits.
- Cam should not drive roller at its vertical centerline to avoid any side loading on roller lever mechanism.

Actuation Force

Under rated conditions*, the approximate actuation force will be as shown in the chart below:

Valve type	Force Nm (lbf)*
DG17V-3-*A	22 - 31 (5 to 7)
DG17V-3-*C	13 - 22 (3 to 5)
DG17V-3-*N	22 - 31 (5 to 7)
DG17V-3-*A	53 - 62 (12 to 14)
DG17V-3-*C	45 - 53 (10 to 12)
DG17V-3-*A	100- 250 (22 to 56)

*Tank return must be designed so that transient tank line pressure peaks do not exceed 6,9 bar (100 psi). For tank return line pressure in excess of 6,9 bar (100 psi) lever movement must be assisted.

Note:

In right hand assembly, operator "A" is always removed. In left hand assembly, operator "B" is always removed. Please note that European designations are the opposite. See diagram on the nameplate of the valve for operator (port) identification.

DG18V-3-**-60 Air Operated

Danfoss air operated DG18V-3-**-60 directional control valves come in four basic versions: 3 position

spring centered; 2 position detent; 2 position spring offset to port A, B operator; 2 position spring offset to port B, A operator.

Note:

Manual actuator in end cap feature (P2) available on single operator models only. In right hand assembly, operator "A" is always removed. In left hand assembly, operator "B" is always removed. See identification plate on top of valve for operator (port) identification.

For every 3,3 bar (50 psi) increase in tank line pressure the air pilot pressure must be increased 0.07 bar (1 psi). Maximum tank line pressure is 100 bar (1450 psi).

Nameplate identification label is asymmetrical and fixes the "A" and "B" operators in relation to the "P" port. Designers should note for installation on vertical panels.

On all right hand models, when operator "A" is pressurized, flow is always P to A. When operator "B" is pressurized, flow is always P to B. Operators "A" and "B" are identified on the identification plate on top of the valve. For left hand assembly this is reversed (P to B when the "A" operator is pressurized).

Shift Time

Shift time is essentially dependent upon pilot pressure, line length and diameter, and speed of control mechanism. Spring return time from the offset to center position is approximately 45 msec. at rated flow and pressure assuming minimal back pressure in the pilot line.

Shifting Action

Spring centered and spring offset types will be spring positioned unless sufficient pilot pressure is maintained at pilot port to shift and hold

the valve spool. No-spring (offered as pilot valves for no-spring detented models only) require only momentary pressurization of pilot port to shift spool (approx. 0.1 seconds).

When pilot pressure is relieved, spool will remain in last position attained provided there is no severe shock, vibration or unusual pressure transients.

Note:

Surges of oil in a common tank line serving these and other valves can be of sufficient magnitude to cause inadvertent shifting of these valves. This is particularly critical in the no-spring and no-spring detented type valves. Separate tank lines or a vented manifold with a continuous downward path to tank is preferred.

Any sliding spool, if held shifted under pressure for long periods of time, may stick and not spring return due to fluid residue formation (silting) and therefore, should be cycled periodically to prevent this from happening.

If this valve is used for purposes other than a 4-way valve or as shown in the graphical symbol on the valve, consult your distributor or sales engineer.

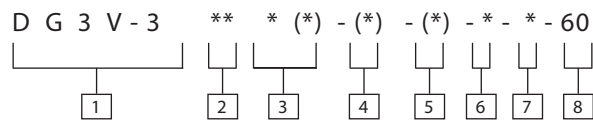
Mounting Position

There is no restriction on mounting of spring centered or spring offset models. Detented models must be mounted with the spool bore horizontal to reduce the possibility of accidental spool shift due to shock and/or vibration.

Port Connections

Port connections are made by mounting the valve on a manifold or subplate having mounting dimensions which conform to NFPA-D03 (ISO-4401-03) configurations.

Model Code



- 1 Valve Type
- 3 – Hydraulically operated
 - V – 350 bar (5000 psi) on P, A & B ports
 - 3 – ISO 4401-03 (CETOP 3,NFPA D03) ISO 4401-AB-03-4-B

- 2 Spool Type
- Refer page 6 for spool type


- 3 Spool Spring Arrangement
- A – Spring offset, end-to-end
 - AL – Same as “A” but left hand build
 - B – Spring offset, end to center
 - BL – Same as “B” but left hand build
 - C – Spring centered

- N – No-spring detent
- 4 Internal Drain (omit if not required)
- A, B & F models only for designs (F models must have internal drain)
- T – Internal drain

- 5 Manual Override Option
- A, B & F models in non-operator end
- P1 – Manual override

- 6 Tank Pressure Limit
- 7 – 210 bar (3000 psi)
- 7 Thread for Pilot/Drain Connection
- P – G 1/8” NPT threads

- B – SAE internal straight threads
- 8 Design
- Installation dimensions remain as shown for design numbers 60 thru 69.



- 1 Valve Type
- * – Operator
 - 17 – Lever operated
 - 20 – Roller cam operated
 - 21 – Plunger operator
 - V – 350 bar (5000 psi) on P, A & B ports
 - 3 – ISO 4401-03 (CETOP 3,NFPA D03) ISO 4401-AB-03-4-B

- 2 Spool Type
- Refer page 7 for spool type

- 3 Spool Spring Arrangement
- A – Spring offset, end-to-


- end
- AL – Same as “A” but left hand build
 - B – Spring offset, end to center
 - BL – Same as “B” but left hand build
 - C – Spring centered
 - N – No-spring detent

- 4 Tank Port Rating
- Omit if not required
- 2 – 10 bar max for DG21V only

- 5 Design
- Installation dimensions remain as shown for design

numbers 60 thru 69.

Model Code



1 Valve Type
18 – Air Operated
V – 350 bar (5000 psi) on P, A & B ports
3 – ISO 4401-03 (CETOP 3,NFPA D03) ISO 4401-AB-03-4-B

2 Spool Type (center condition)
Refer page 8 for spool type

3 Spool Spring Arrangement
A – Spring offset to A, (single operator)
AL – Spring offset to B, L.H. build (single operator)
B – Spring centered, operator A removed (single operator)
BL – Spring centered, operator B removed (single operator)
C – Spring centered (dual operator)
F – Spring offset, shift to center (single operator)

FL – Spring offset, shift to center, L.H. build (single operator)
N – No-spring detented

4 Manual Override Option
(Applicable for A(L), B(L) & F(L) models only)
Blank – Overrides in operator end only
P2 – Override in both ends of single operators

5 Actuator Identity
Blank – Standard arrangement (i.e. apply air to operator A to give flow P to A) (Ref. US ANSI B93.9)
V – Operator identification determined by position of operator (i.e. operator A at A port end of valve operator B at B port end of valve)

Note: Type 8 spool conforms to both methods. All type 8 spools must designate V in model code.

6 Pilot Source Thread Connections
P – 1/8" NPT threads
B – 1/8" BSP threads

7 Design
Installation dimensions remain as shown for design numbers 60 thru 69.

Functional Symbols

Spool Options for DG3V-3-60

Spool Options	Model	Basic Valve Symbol	Usable Spool Options
0	DG3V-3-**		0, 2, 6 & 22
2	DG3V-3-**A ♦		0, 2, 6 & 22
3	DG3V-3-**A-T ♦		0, 2, 6
6	DG3V-3-**B ♦		0, 2, 3, 6 & 33
22	DG3V-3-**B-T ♦		0, 2, 3, 6 & 33
33	DG3V-3-**C		R.H. build only 0, 2, 3, 6 & 33
	DG3V-3-**F-T ♦		0, 2, 3, 6 & 33
	DG3V-3-**N		R.H. build only 0, 2, 6

Single operator models marked ♦ are optionally available with a manual override in the non-operator end only.













Models with operators at both ends are not available with manual overrides.

- Full flow
↔ Restricted flow

- NOTE:
- a) Pilot pressure must always exceed drain line pressure or, for internally drained valves, the T-line pressure by at least the requisite minimum pilot pressure. Open-center spools (0, 1 and 8) should be used only in externally drained valves.
 - b) Internally drained valves may be used only when surges in the tank line cannot possibly overcome the minimum pilot pressure differential referred to above. When the possibility of pressure surges in the tank line exist externally drained valves are recommended.

Functional Symbols

Spool Options for DG17/20/21V-3-60

Spool Options	Model	Basic Valve Symbol	Usable Spool Options
0 	DG17V-3-**A DG20V-3-**A		0, 2, 6, & 22 0, 2, 6, & 22
2 	DG20V-3-**A2		0, 2, 6 & 33
6 	DG20V-3-**A2L		0, 2, 6 & 33
7 	DG17V-3-**C DG20V-3-**C		0, 2, 6, 7 & 33 0, 2, 6, & 33
22 	DG17V-3-**8C		8
33 	DG17V-3-**N		0, 2, 6, 7 & 33
8 	DG21V-3-2A		2
	DG21V-3-2AL		2

→ Full flow
→ Restricted flow

Functional Symbols

Spool Options for DG18V-3-*-60

Spool Options	Model	Basic Valve Symbol	Usable Spool Options
1	DG18V-3-**A ♦		0, 2, 6, 7 & 22
2	DG18V-3-**B ♦		0, 1, 2, 3, 6, 7 & 33
3	DG18V-3-**8B ♦		8
6			
7	DG18V-3-**C		0, 1, 2, 3, 6 & 33
22	DG18V-3-**8C		8
33	DG18V-3-**F ♦		0, 1, 2, 3, 6, 7 & 33
8	DG18V-3-**N		0, 2, 6

Single operator models marked ♦ are optionally available with a manual override in the non-operator end only.
Models with operators at both ends are not available with manual overrides.

- Full flow
- ↔ Restricted flow

NOTE:

- a) Pilot pressure must always exceed drain line pressure or, for internally drained valves, the T-line pressure by at least the requisite minimum pilot pressure.
Open-center spools (0, 1 and 8) should be used only in externally drained valves.
- b) Internally drained valves may be used only when surges in the tank line cannot possibly overcome the minimum pilot pressure differential referred to above.
When the possibility of pressure surges in the tank line exist externally drained valves are recommended.

Operating Data

DG3V-3-**-60 Hydraulic Operator

Maximum flow:	See chart on page 9.
Maximum operating pressure:	350 bar (5000 psi)
Maximum tank line pressure:	210 bar (3000 psi)
Minimum pilot pressure:	See chart on page 9.
Recommended fluid viscosity range:	13-54 cSt
Weight:	1,2 kg (2.5 lbs.)
Operating Data	
Control (swept) volume(s):	
DG3V-3**A(L) models, end-to-end:	0,8 cm ³ (0.050 in ³)
DG3V3-**B(L)/F(L) models:	
center-to-end	0,4 cm ³ (0.025 in ³)
DG3V-3-**C/N models:	
center-to-end	0,4 cm ³ (0.025 in ³)
end-to-end	0,8 cm ³ (0.050 in ³)
DG3V-3-**(N) no-spring and detented valves require only momentary pilot pressurization to shift spool (in approx. 0.1 seconds). All other models require pilot pressure to be maintained to shift and hold the spool.	

DG17/20/21-3-**-60 Lever/Cam/Plunger Operator

Maximum flow:	75 l/min (20 USgpm)
Maximum operating pressure:	(A, B & P ports) 350 bar (5000 psi)
Maximum tank line operating pressure:	6,9 bar (100 psi)
Minimum pilot pressure:	100 bar (1450 psi) 10 bar (145 psi) DG21 model only
Recommended viscosity range	14 - 86 cSt (75 - 400 SUS) @ 18°C to 66°C (0°F to 150°F)
Weights:	
DG17V Lever operated	1,8 kg (4.0 lbs)
DG20V Cam operated	1,2 kg (2.5 lbs)
DG21V Plunger operated	1,2 kg (2.5 lbs)

DG18V-3-**-60 Air Operator

Maximum flow:	75 l/min (20 USgpm)
Maximum operating pressure:	(A, B & P ports) 350 bar (5000 psi)
Maximum tank line operating pressure*:	100 bar (1450 psi)
Maximum air pilot pressure:	10 bar (150 psi)
Minimum air pilot pressure:	1,7 bar (25 psi)
Operating temperature range:	-18°C to 66 °C (0 °F to 150 °F)
Mounting interface:	ISO 4401-03, CETOP 3 (NFPA D03)
Recommended viscosity range:	14 - 86 cSt (75 - 400 SUS)
Weights:	
Dual operator models	1,5 kg (3.4 lbs.)
Single operator models	1,2 kg (2.7 lbs.)

* For every 3,3 bar (50 psi) increase in tank line pressure, the air pilot pressure must be increased 0,07 bar (1 psi).

Operating Data	
Control (swept) volume(s):	
DG18V-3"A(L) end-to-end	3,6 cm ³ (0.219 in ³)
DG 18V3"B(L)/F(L) center-to-end	1,8 cm ³ (0.109 in ³)
DG3V-3"C/N center-to-end	1,8 cm ³ (0.109 in ³)
end-to-end	3,6 cm ³ (0.219 in ³)


Performance Data

DG3V-3-*A(L)

Pilot Pressure Requirements

The spools require the minimum pilot pressures shown in the graph below to overcome the spring force and any flow forces. Some spools are limited by the ability to spring return the valve.

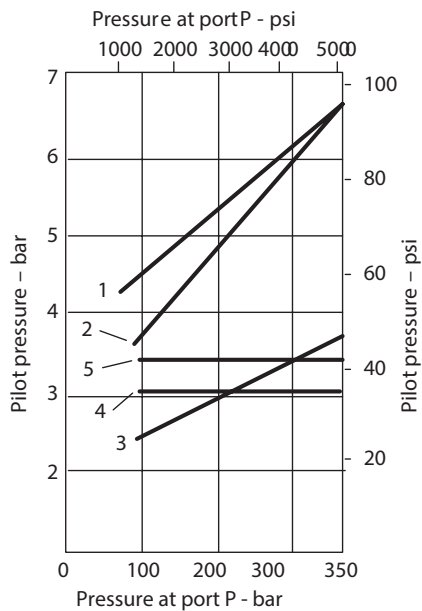Minimum pilot pressure required at a flow rate of 20 l/min (5.5 USgpm):




Spool/Spring	Curve
0A(L)	1
0C	3
0F(L)	3
2A(L)	1
2C	1
2F(L)	4
6A(L)	1
6C	1
6F(L)	4
22A	5
33C	2


Maximum Flow Rates

Some spools are limited in the conditions they will operate without reliability problems. These are the single ended spools which must operate within limits outlined in the graph below.

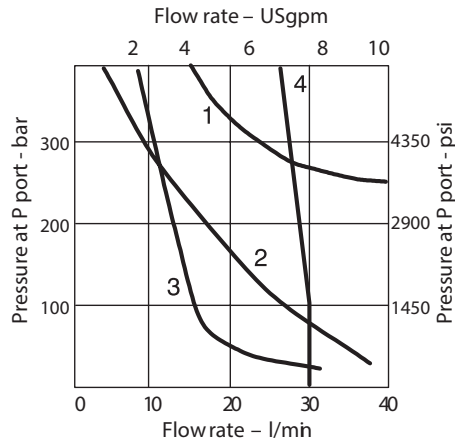Spool malfunction limits



Pressure Drop Curves

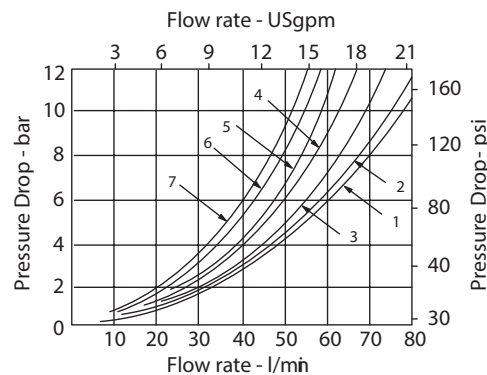

Spool/Spring	P to A	A to T	P to B	A to T	P to T	Max flow l/min (USgpm) @ 350 bar (5000 psi)
0	4	2	4	2	4 ▼	38 (10)
0A	5	2	5	2	4 ▼	■
0B, 0C, 0F	4	2	4	2	4	38 (10)
0N	3	7	3	7	4 ▼	38 (10)
2	5	2	5	2	—	38 (10)
2A	6	5	6	5	—	■
2B, 2C, 2F	5	2	5	2	—	38 (10)
2N	6	3	6	3	—	38 (10)
3B, 3C, 3F	6	3	6	1	—	38 (10)
6	6	1	6	1	—	38 (10)
6A	5	7	5	7	—	■
6B, 6C, 6F	6	1	6	1	—	38 (10)
6N	7	1	7	1	—	38 (10)
22A	6	—	6	—	—	■
33B, 33C, 33F	5	2	5	2	▲	38 (10)

▲ Type "33" spool at center will pass approx. 20 l/min (5.3 USgpm) at 124 bar (1800 psi) pressure drop from port A or B (the other being plugged) to T. ▼ Transient condition. ■ See graph above, Max. Flow Rates.

Pressure Drop Characteristics

The pressure drop curves give approximate pressure drop ΔP when passing 21 cSt (100 SUS) fluid(s) having .87 specific gravity.

For any other viscosity the pressure drop ΔP will change as follows:

Viscosity							
cSt	14	32	43	54	65	76	86
(SUS)	(75)	(150)	(200)	(250)	(300)	(350)	(400)
% of ΔP (Approx.)	93	111	119	126	132	137	141

For any other specific gravity (G_1)* the pressure drop P will be approximately:
 $\Delta P_1 = \Delta P(G_1/G)$

* Specific gravity of fluid may be obtained from its producer. Fire-resistant fluids have higher specific gravities than oil.

Spool/Spring	Curve
0A(L)	1
2A(L)	2
6A(L)	3
22A(L)	4















NOTE: For spool types 3 and 6; not recommended for flows in excess of 60 l/min (15.8 USgpm).

Performance Data

DG17V-3

DG17V-3-**-60

Pressure drop curve reference chart

Spool Type		P—A	B—T	P—B	A—T	P—T @CENTER	Maximum flow @ 350 bar (5000 psi)
	"0C"	4	2	4	2	4	75 l/min (20 USgpm)
	"2C"	5	2	5	2	—	
	"6C"	6	1	6	1	—	
	"7C"	4	3	4	3	—	
	"33C"	5	2	5	2	**	
	"0A"	5	2	5	2	—	55 l/min (15 USgpm)
R.H. 	"2A"	6	5	6	5	—	
L.H. 	"6A"	5	7	5	7	—	
	"22A"	6	—	6	—	—	75 l/min (20 USgpm)
	"0N"	4	2	4	2	4	
	"2N"	5	2	5	2	—	
	"6N"	6	1	6	1	—	55 l/min (15 USgpm)
	"7N"	4	3	4	3	—	
	"33N"	5	2	5	2	**	

**Note type "33" spool at center will pass approximately 20 l/min. (5.3 USgpm) at 124 bar (1798 psi) inlet pressure.


The pressure drop curves give approximate pressure drop ΔP when passing 36 cSt (100 SUS) fluid(s) having .87 specific gravity.

For any other viscosity the pressure drop ΔP will change as follows:

Viscosity							
cSt	14	32	43	54	65	76	86
(SUS)	(75)	(150)	(200)	(250)	(300)	(350)	(400)
% of ΔP (Approx.)	93	111	119	126	132	137	141

For any other specific gravity (G_1) the pressure drop ΔP will be approximately: $\Delta P_1 = \Delta P (G_1 / G)$








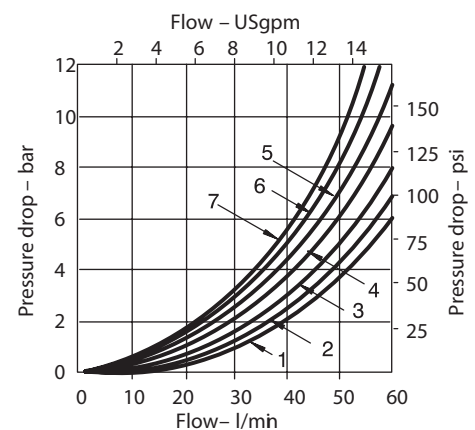
* Specific gravity of fluid may be obtained from its producer.



Performance Data

DG20/21V-3

Pressure drop curve – reference chart

Spool Type	P — A	B — T	P — B	A — T	P — T @CENTER	Maximum flow @ 350 bar (5000 psi)
 "0C"	2	2	2	2	2	
 "2C"	2	3	2	3	—	75 l/min (20 USgpm)
 "6C"	3	1	3	1	—	
 "33C"	2	2	2	2	**	
 "0A"	2	2	2	2	—	38 l/min (10 USgpm)
 "2A"	2	3	2	3	—	
 "33A"	2	2	2	2	—	
 "6A"	3	1	3	1	—	19 l/min (5 USgpm)

**Note type "33" spool at center will pass approximately 20 l/min. (5.3 USgpm) at 124 bar (1798 psi) inlet pressure.


The pressure drop curves give approximate pressure drop ΔP when passing 36 cSt (100 SUS) fluid(s) having .87 specific gravity.

For any other viscosity the pressure drop ΔP will change as follows:

Viscosity							
cSt (SUS)	14 (75)	32 (150)	43 (200)	54 (250)	65 (300)	76 (350)	86 (400)
% of ΔP (Approx.)	93	111	119	126	132	137	141

For any other specific gravity (G_1)* the pressure drop ΔP will be approximately: $\Delta P_1 = \Delta P (G_1 / G)$

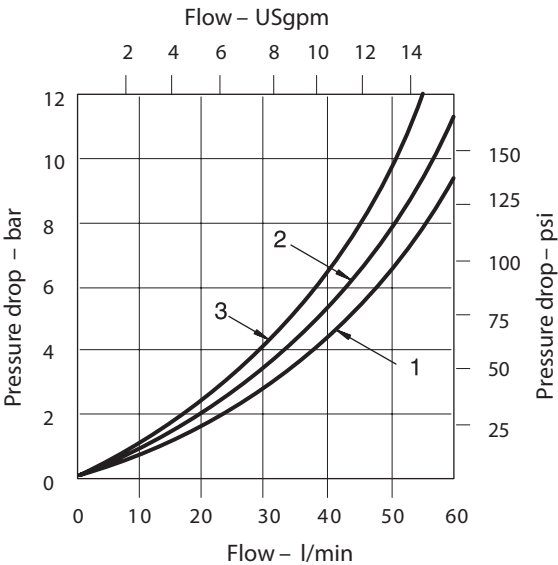* Specific gravity of fluid may be obtained from its producer.





Performance Data

DG18V-3

DG 1SV-3-**-60

Maximum flow without malfunction @350 bar (5000 psi) in l/min (USgpm)


Valve type	"0"	"1"	"2"	"3"	"6"	"7"	"8"	"33"
	—	—	15 (4)	—	—	—	—	—
	57 (15)	—	57 (15)	—	30 (8)	26 (7)	—	—
	76 (20)	19 (5)	57 (15)	76* (20)	26 (7)	57 (15)	38 (10)	57* (15)
	76 (20)	19 (5)	57 (15)	76* (20)	26 (7)	57 (15)	38 (10)	57* (15)
	76 (20)	19 (5)	57 (15)	76* (20)	26 (7)	57 (15)	—	57* (15)
	53 (14)	76 (20)	45 (12)	—	—	—	—	—

* 2 bar (30 psi) air pilot pressure required

Pressure drop curve reference chart

Spool type	P-A	B-T	P-B	A-T	P_T @Center
 "0B" "0C" "0F"	4	2	4	2	4
 "1B" "1C" "1F"	5	3	5	3	6
 "2B" "2C" "2F"	5	2	5	2	—
 "3B" "3C" "3F"	6	3	6	1	—
 "6B" "6C" "6F"	6	1	6	1	—
 "7B" "7C" "7F"	4	3	4	3	—
 "8B" "8C"	6	4	6	4	8
 "33B" "33C" "33F"	5	2	5	2	**
"0A"	5	2	5	2	—
"2A"	6	5	6	5	—
"6A"	5	7	5	7	—
"7A"	6	7	6	7	—
"22A"	6	—	6	—	—
"0N"	3	7	3	7	—
"2N"	6	3	6	3	—
"6N"	7	1	7	1	—

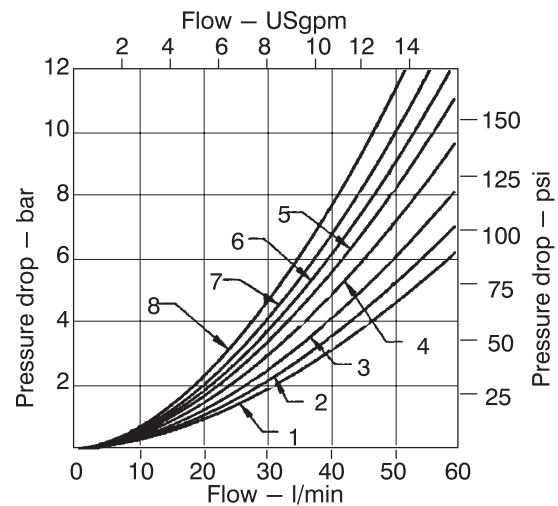** NOTE: Type "33" spool at center, will approximately pass 20 l/min. (5.3 USgpm) at 124 bar (1798 psi) inlet pressure.



The pressure drop curves give approximate pressure drop ΔP when passing 36 cSt (100 SUS) fluid(s) having a specific gravity of .87.

For any other viscosity the pressure drop ΔP will change as follows:

Viscosity							
cSt	14	32	43	54	65	76	86
(SUS)	(75)	(150)	(200)	(250)	(300)	(350)	(400)
% of ΔP (Approx.)	93	111	119	126	132	137	141

For any other specific gravity (G_1)* the pressure drop ΔP will be approximately: $\Delta P_1 = \Delta P (G_1 / G)$



* Specific gravity of fluid may be obtained from its producer.

Installation Dimensions


DG3V-3-*-60

DG3V-3-*-60 Hydraulic Operated

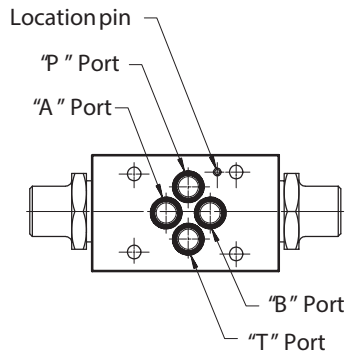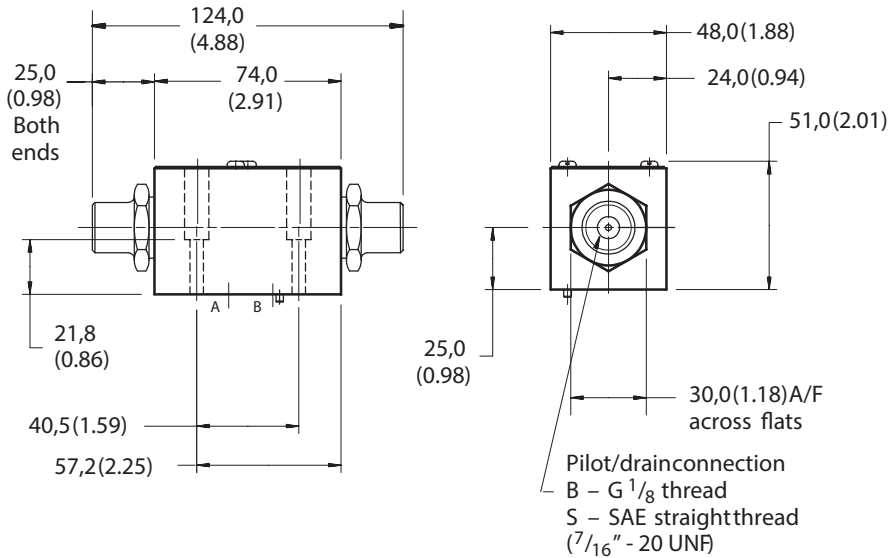
Millimeters (inches)



DG3V-3-**(L)-7-*-60
 DG3V-3-**A(L)-7-*-60
 DG3V-3-**B(L)-7-*-60
 DG3V-3-**C-7-*-60
 DG3V-3-**N-7-*-60

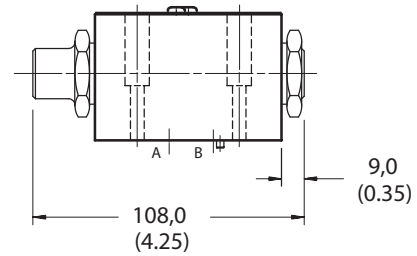

DG3V-3-**A-T-7-*-60
 DG3V-3-**B-T-7-*-60
 DG3V-3-**F-T-7-*-60

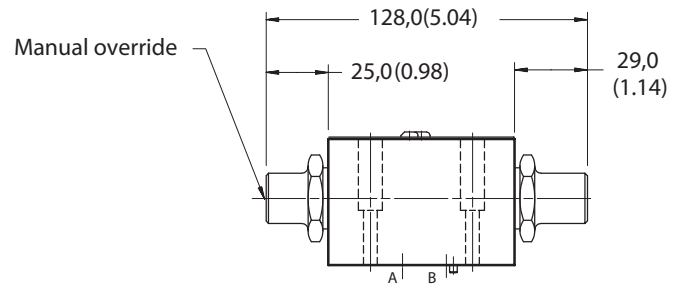


DG3V-3-**A-T-P1-7-*-60
 DG3V-3-**B-T-P1-7-*-60
 DG3V-3-**F-T-P1-7-*-60

Installation Dimensions

DG17V-3-*-60

DG17V-3-*-60 Lever Operated

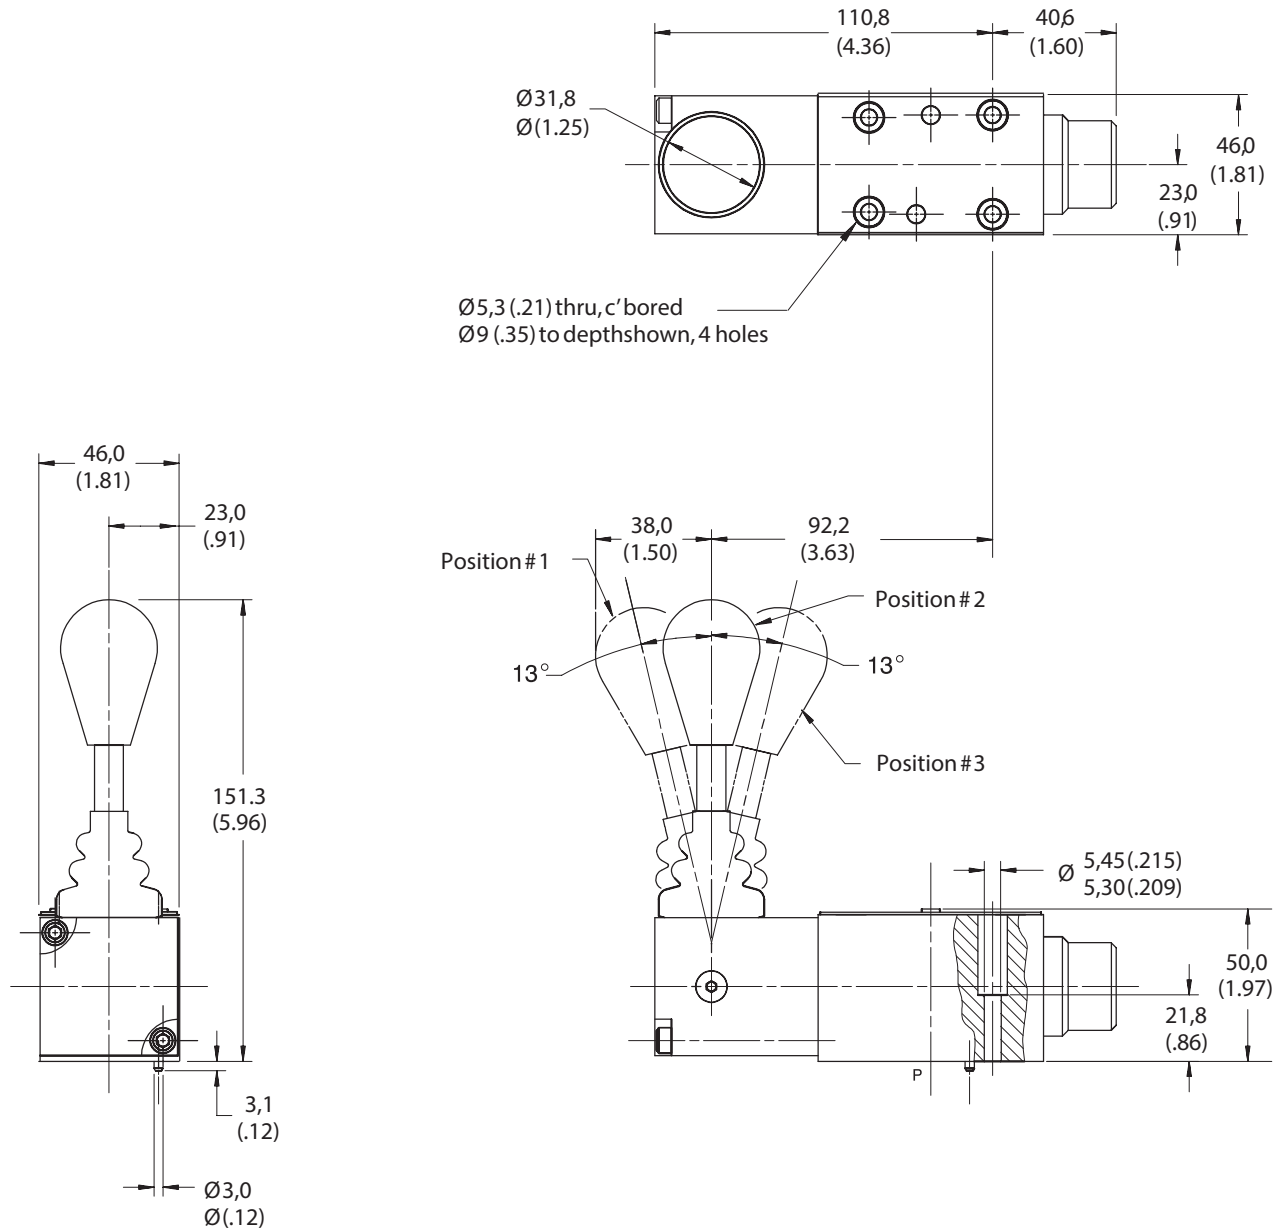Millimeters (inches)




Installation Dimensions

DG20V-3-*-60

DG20V-3-*-60 Cam Operated

Millimeters (inches)

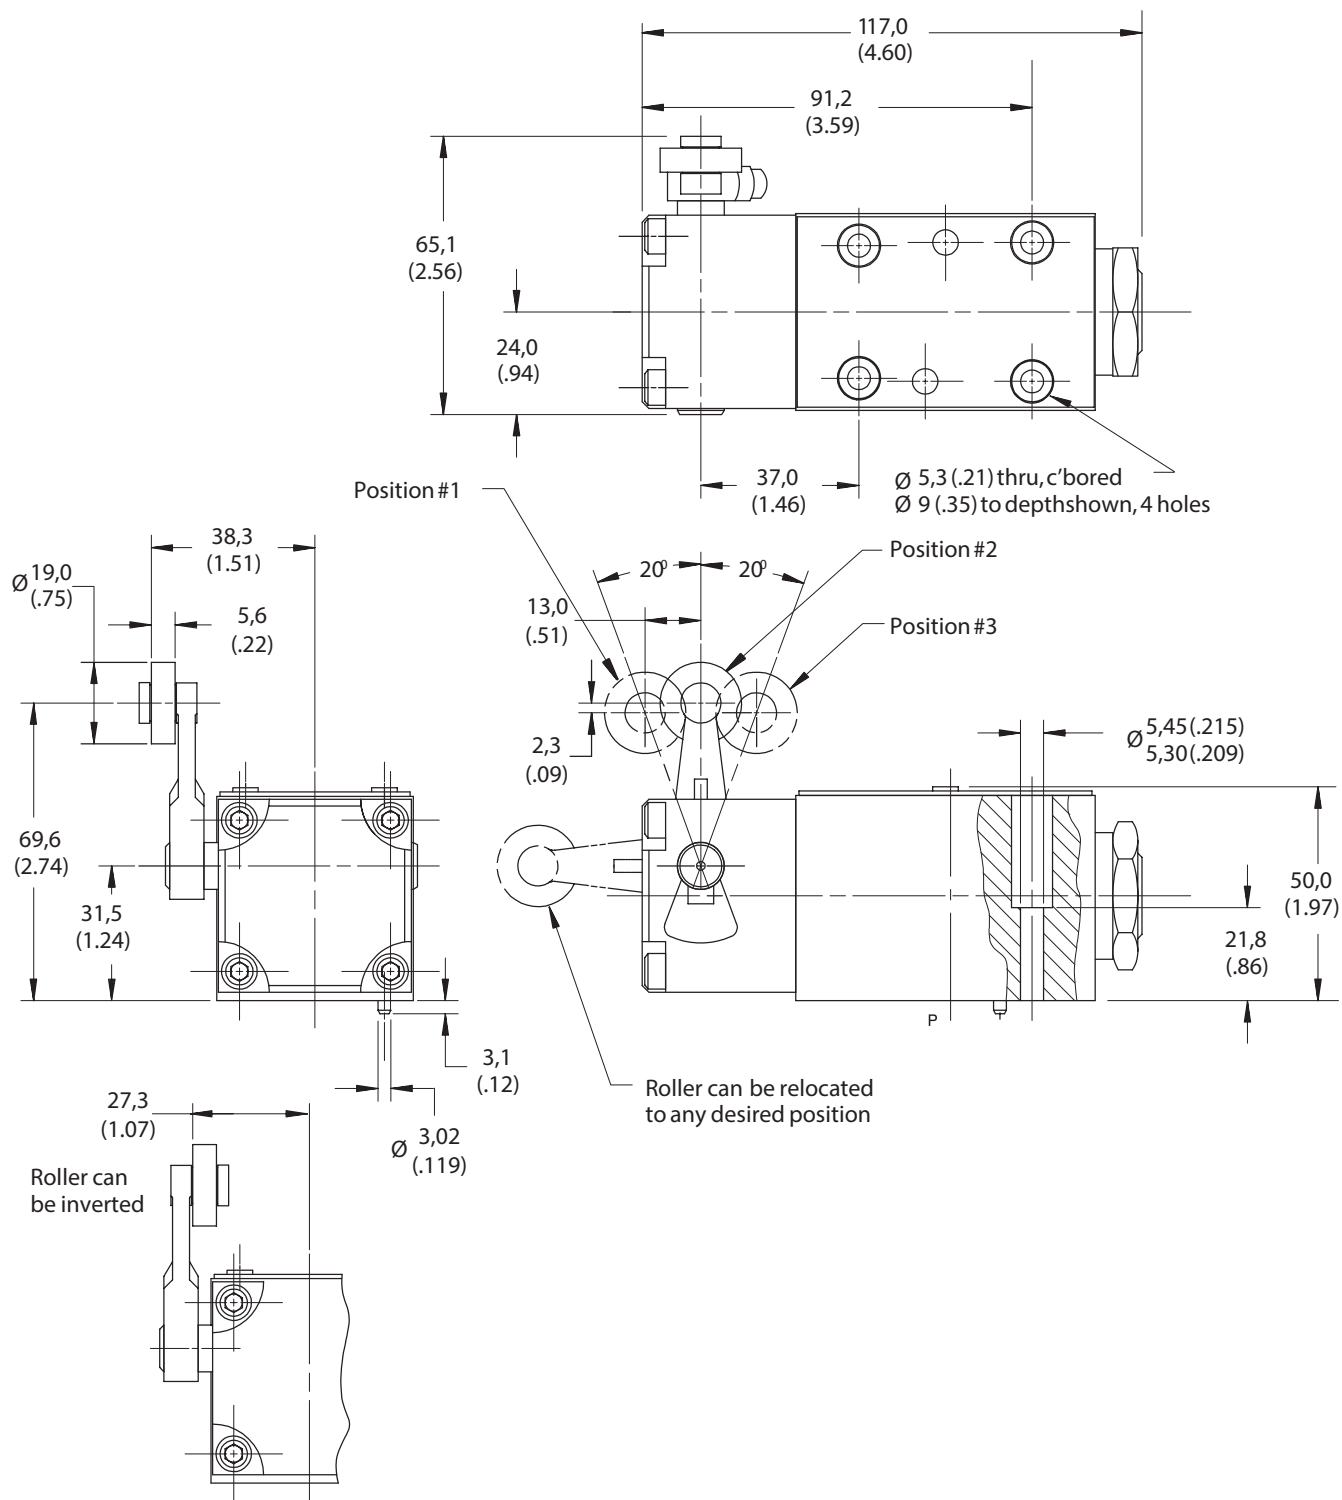E



DG21V-3-A(L)-2-60

Millimeters (inches)





Installation Dimensions

DG18V-3-*-60

DG18V-3-*-60 Air Operated

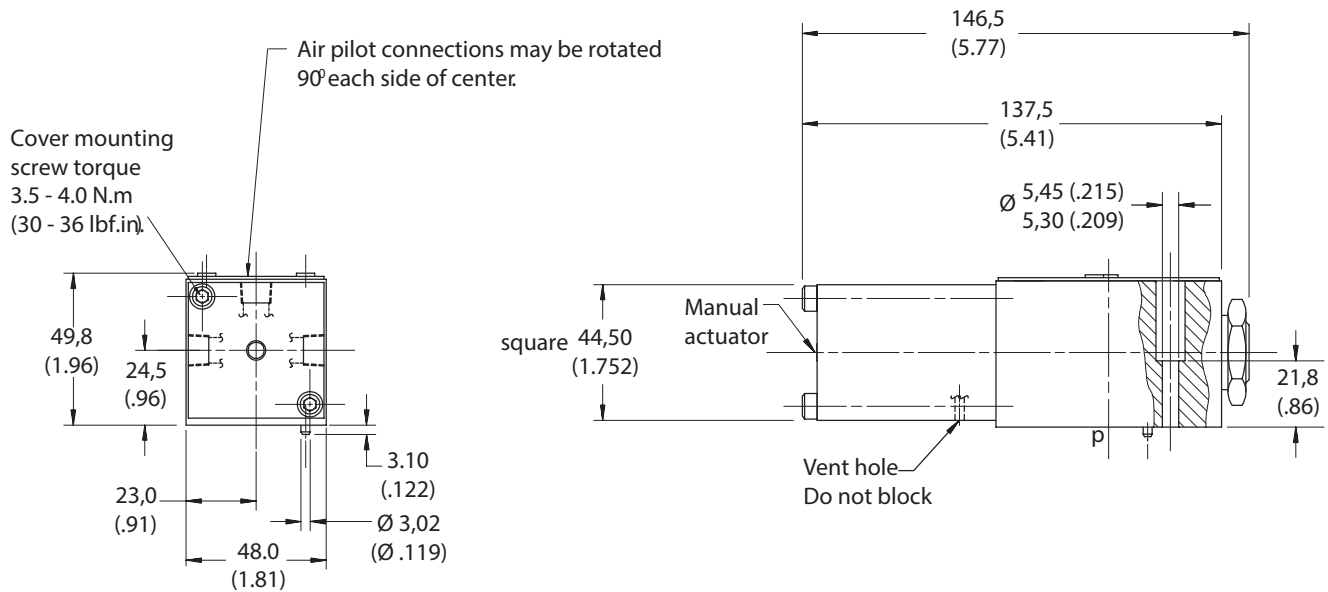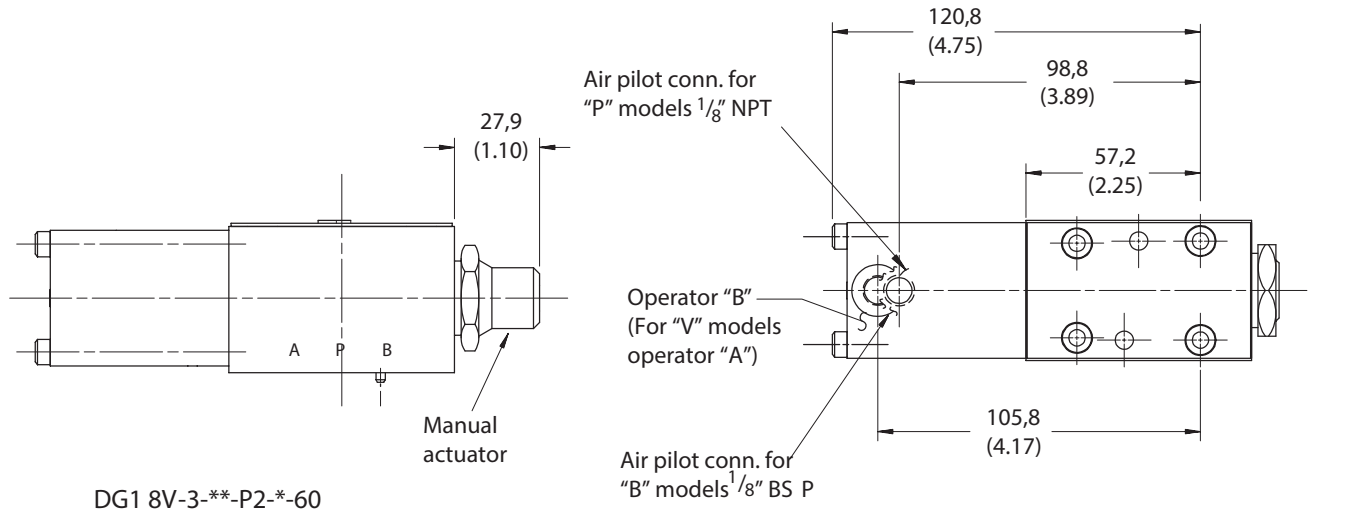Millimeters (inches)




Installation Dimensions

DG18V-3-* -60

DG18V-3-* -60 Air Operated

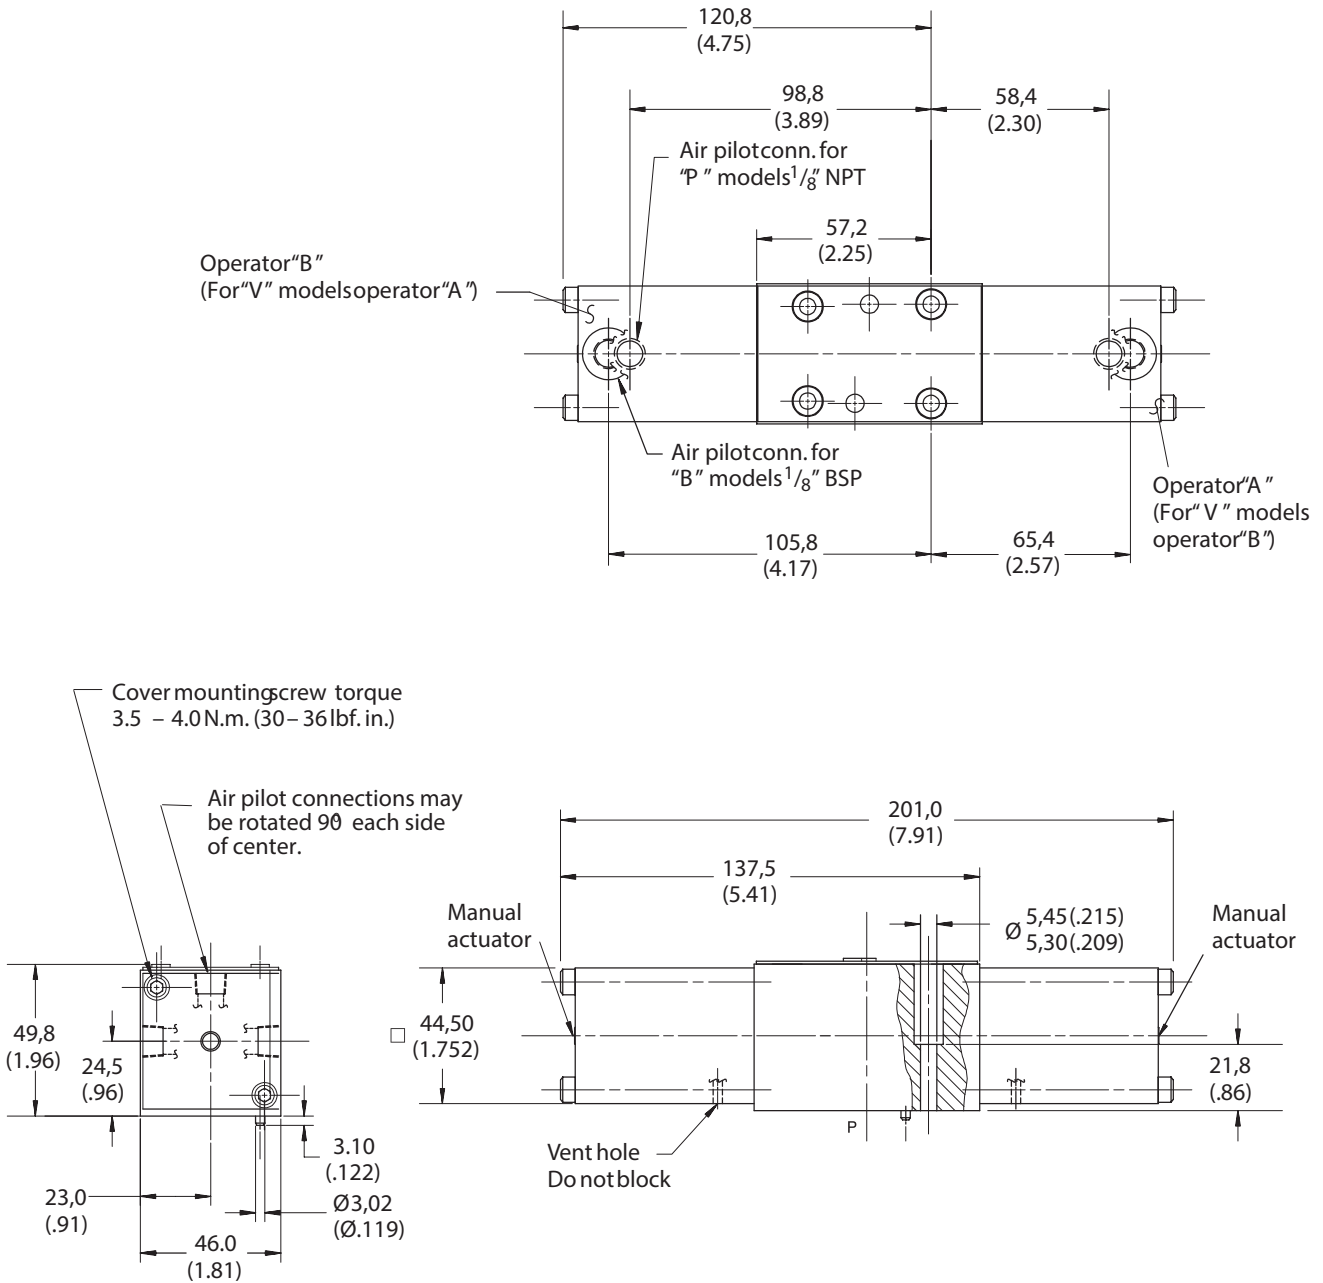Millimeters (inches)



Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.